


CATALOGUE

# ECONO LIFT

## ERGONOMIC PRODUCTS



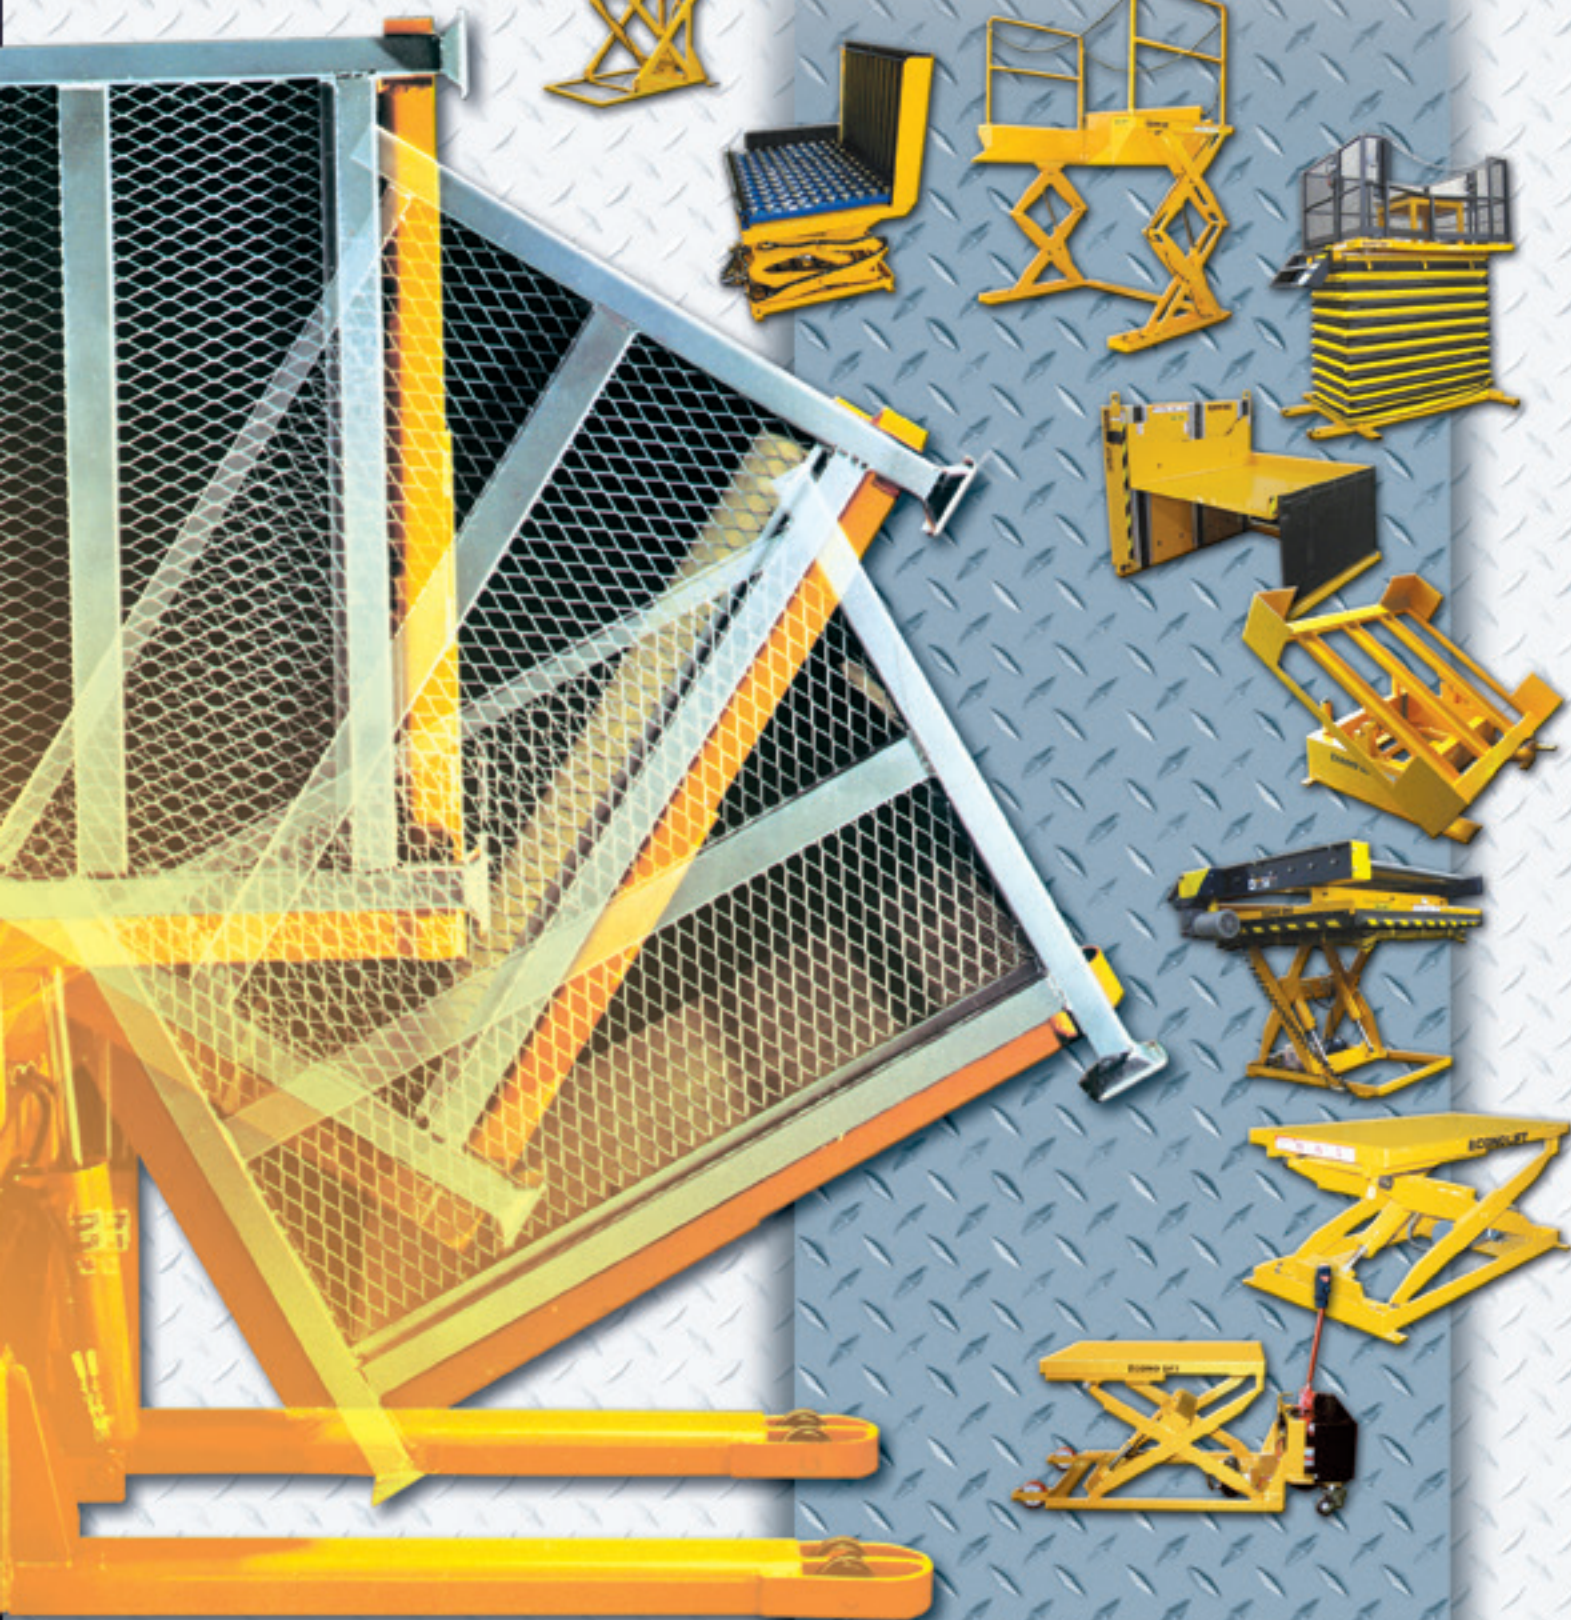


# ECONO LIFT

## TILTERS

Tote Box  
Tilter




Straddle Tilter



Stationary Tilter



Powered Tilter



## LIFT & TILTS

Light Duty Stationary  
Foot Pump Lift



Light Duty Stationary Lift



Light Duty  
Portable Foot  
Pump Lift




Light Duty D/C  
Portable Lift




Light Duty  
Double  
Scissor Lift



Double  
Scissor  
Lift  
Table



Low Profile  
Scissor Lift



Light Duty  
Portable Lift



Loading  
Dock



Heavy Duty  
Scissor Lift



Lift Table



Tandem Scissor Lift



Tilt Table



Portable Foot  
Pump Double  
Scissor Lift




Spring Table



Low Profile  
Loading Dock



Mechanical  
Gravity Tilter



Lift/Tilt  
Table



# ERGONOMIC PRODUCTS

## LIFT & TILTS

*Hand Pump  
Skid Lift*



*Battery Skid Lifts*



*Self Propelled  
Portable Skid Lift*



*Self Propelled  
Lift Table*



## STACKERS

*Battery Winch  
Stackers with  
Fixed  
Platform*



*Ergo Work  
Positioner*



*Straddle Work  
Positioner*



## DRIVE-ONS


*Drive-on  
Platform Lift*



*Drive-on  
Lift Table*



*Drive-on  
Tilt Table*



*Drive-on  
Loading Dock*



*Drive-on High  
Point Tilter*




*Drive-on  
Lift/Tilt Table*




## TURNTABLES

*Powered Turntable*



*Manual Turntable*



## DUMPERS & UPENDERS

*Stationary  
Uprender*



*Stationary  
Dumper*



*Portable  
Drum  
Dumper*



## AIR BAGS

*Lift Table*



*Tilt Table*




*Lift/Tilt  
Table*



*Ergo  
Self-Leveller  
Table*





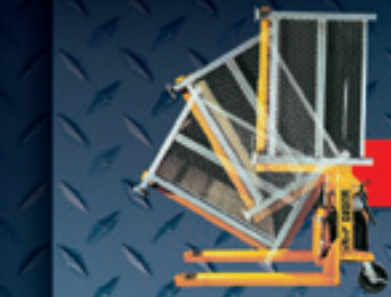

## TILTERS

Tote Box Tilters.....	1
Straddle Tilters .....	2
Powered Tilters .....	3
Stationary Tilters .....	4



## LIFTS & TILTS

Light Duty Portable Lifts .....	5
Portable Foot Pump Double Scissor Lifts .....	6
Portable Foot Pump Lift Tables.....	6
Light Duty Stationary Lifts .....	7
Lift Tables .....	8
Heavy Duty Lift Tables.....	10
Tandem Scissor Lifts.....	11
Double Scissor Lift Tables .....	12
Mechanical Gravity Tilters.....	14
Tilt Tables .....	14
Lift/Tilt Tables .....	15
Self Propelled Lift Tables.....	16
Hand Pump/Battery Skid Lifts .....	17
Self Propelled Portable Skid Lifts .....	17
Loading Docks.....	18
Low Profile Scissor Lifts .....	19
Low Profile Loading Dock.....	19
Spring Tables.....	20





## STACKERS

Battery Winch Stackers with Fixed Platform ...	20
Ergo Work Positioners .....	21



## DRIVE-ONS

Drive-On Lift Tables .....	22
Drive-On Loading Docks .....	23
Drive-on Tilt Tables .....	24
Drive-on Lift/Tilt Tables.....	25
Drive-on High Point Lift Tables.....	26
Drive-on Platform Lifts .....	27



## DUMPERS & UPENDERS

Stationary Dumpers.....	28
Portable Drum Dumpers .....	30
Stationary Upenders.....	31



## TURNTABLES

Manual Turntables.....	32
Power Turntables.....	32




## AIR BAGS

Tilt Tables .....	33
Lift Tables .....	34
Lift/Tilt Tables .....	35
Ergo Self-Leveller .....	36



## CUSTOMIZED EQUIPMENT AT STANDARD PRICES

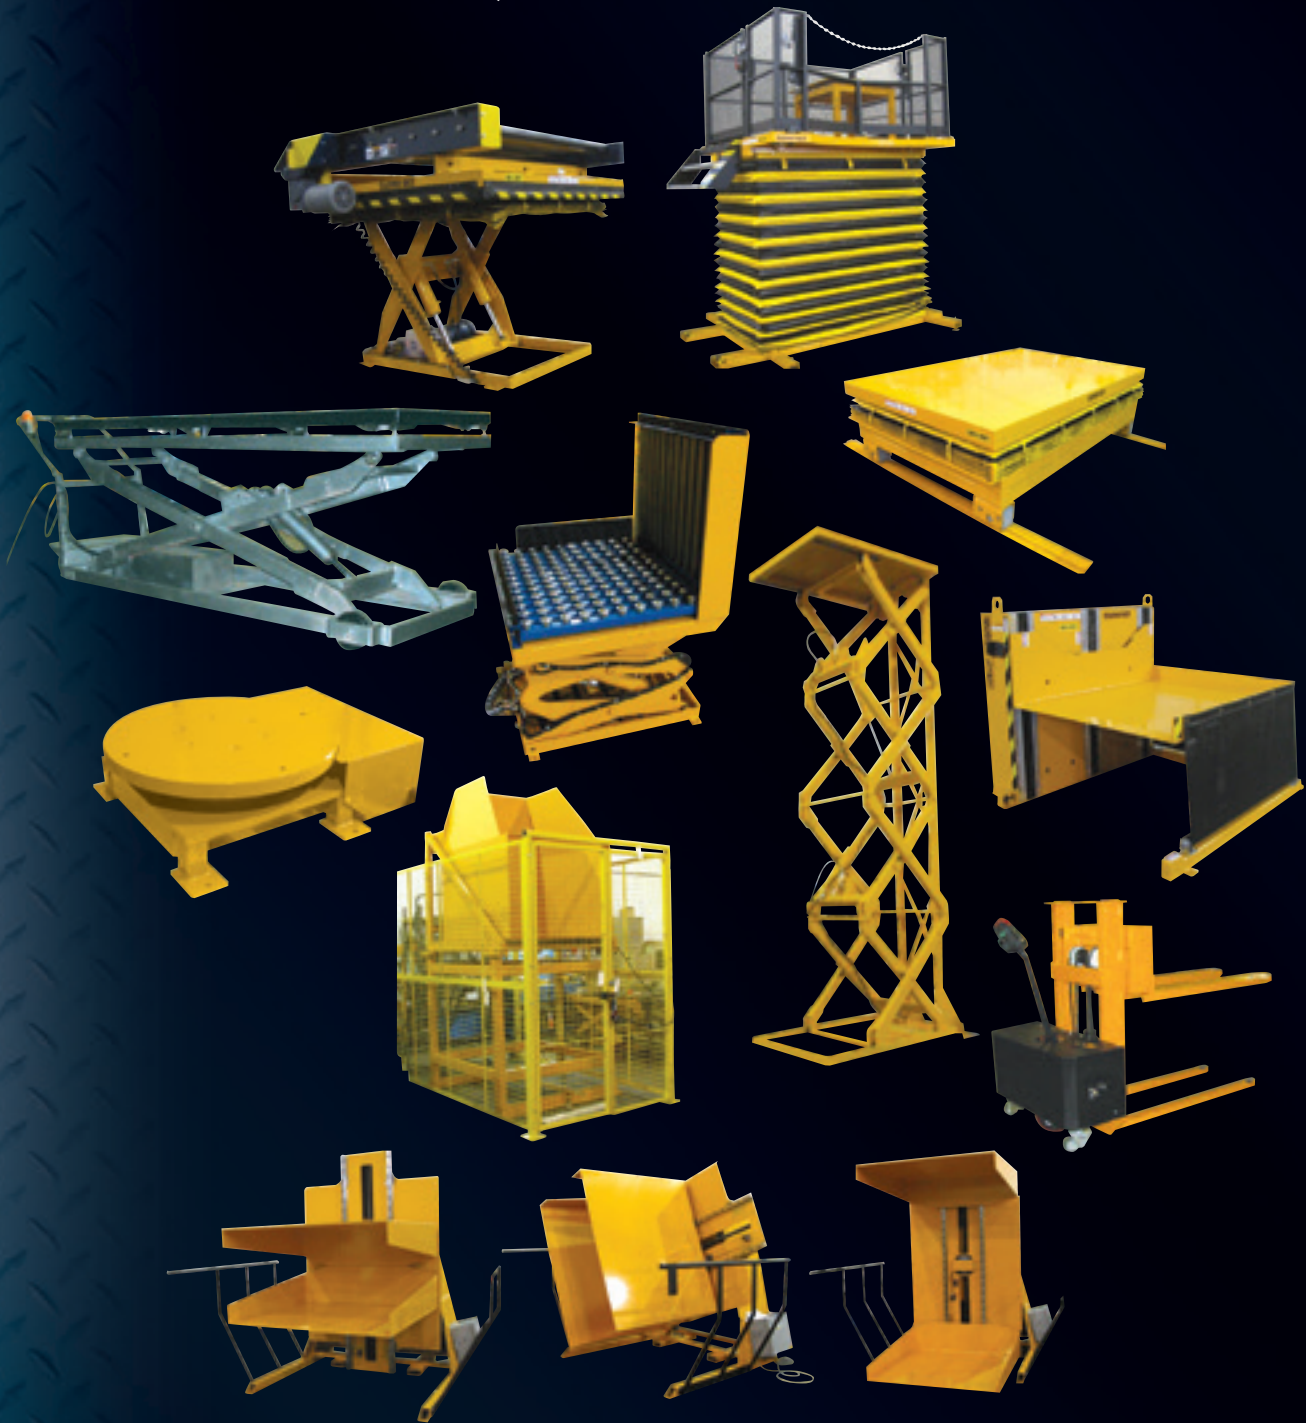


## TILTING • DUMPING • LIFTING • TURNING

FOR SPECIAL SIZES AND CAPACITIES PLEASE CONSULT THE FACTORY



# TOTE BOX TILTERS

2,000/4,000/6,000 LBS

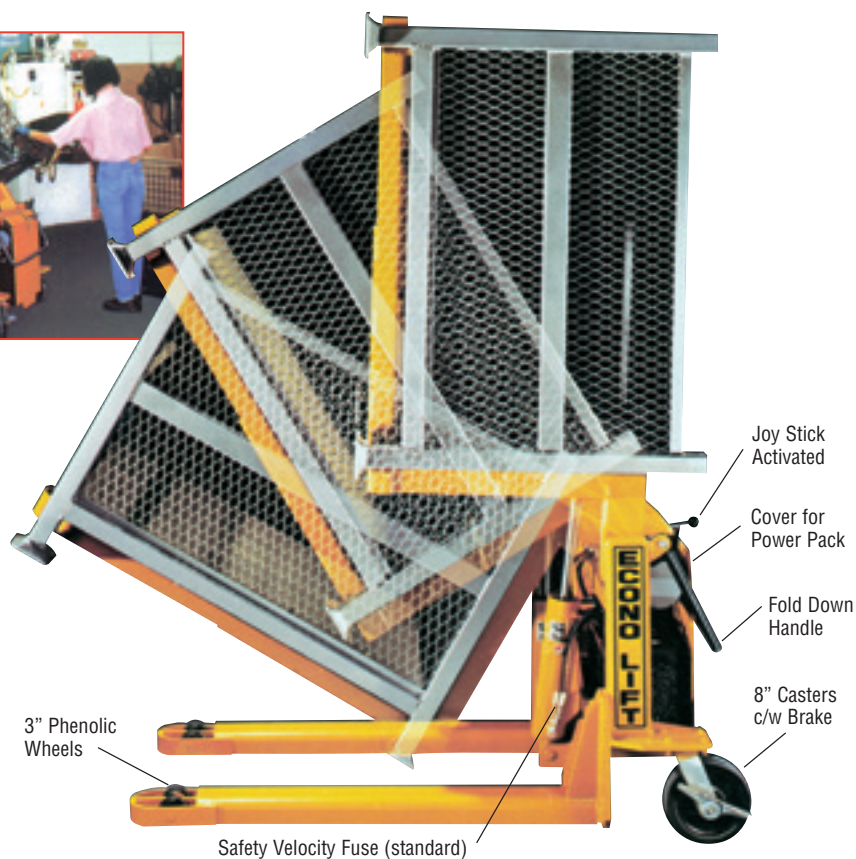

PATENT # 1254861

The portable tote box tilter is designed to make the lifting, handling and positioning of small parts containers easy on the worker's back.

Tilts hydraulically to 94°

Makes parts easily reachable

- Prevents back strain
- Increases productivity.

## POWER SUPPLIES

### D/C Battery

Joy Stick Controlled

### Air/Hydraulic

Foot Pedal

(80 p.s.i., 20 c.f.m. min.)

hand held pendants optional



### A/C 115/60/1

Hand Held Pendant

## OPTIONS

- Forks - longer/shorter, higher / lower to 3", wider / narrower
- Tray attachment
- Height of backplate at 90° can be higher or lower

## OPTIONS & SPECIAL APPLICATIONS




SPECIFICATIONS		TR20	TR40/TR60
<b>Capacity</b>		<b>2,000</b>	<b>4,000 / 6,000</b>
<b>A</b>	Load Centre	in. 17	21
<b>B</b>	Lowered Height	in. 3 1/2	3 1/2
<b>C</b>	Lift	in. 35 1/2	35 1/2
<b>D</b>	Tilt Angle	94°	94°
<b>E</b>	Fork Length	in. 34	42
<b>F</b>	Fork Width O.D.	in. 21	27
<b>G</b>	Fork Width	in. 6	7
<b>H</b>	Overall Length	in. 48	58
<b>K</b>	Width	in. 28	36
<b>L</b>	Height	in. 27 1/2	28
	Weight	lbs. 500	600
	Load Wheels	in. 3 x 1 1/2	3 x 1 1/2
	Caster	in. 6	8



# STRADDLE TILTERS


2,000/4,000/6,000 LBS

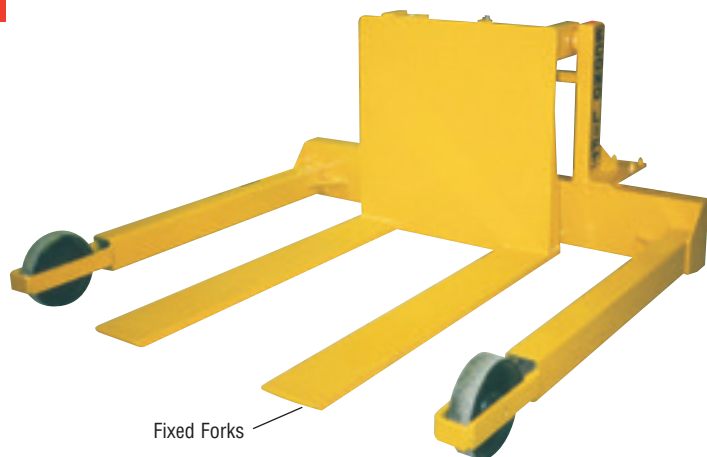


Fixed Forks



8" Wheels  
and Casters



SIDE VIEW



TOP VIEW



The portable tote box tilter is designed to make the lifting, handling and positioning of small parts containers easy on the worker's back.

Tilts hydraulically to 94°

Makes parts easily reachable

- Prevents back strain
- Increases productivity.

## POWER SUPPLIES

### D/C Battery

Joy Stick Controlled

### Air/Hydraulic

Foot Pedal


(80 p.s.i., 20 c.f.m. min.)

*hand held pendants optional*

### A/C 115/60/1

Hand Held Pendant

## OPTIONS & SPECIAL APPLICATIONS

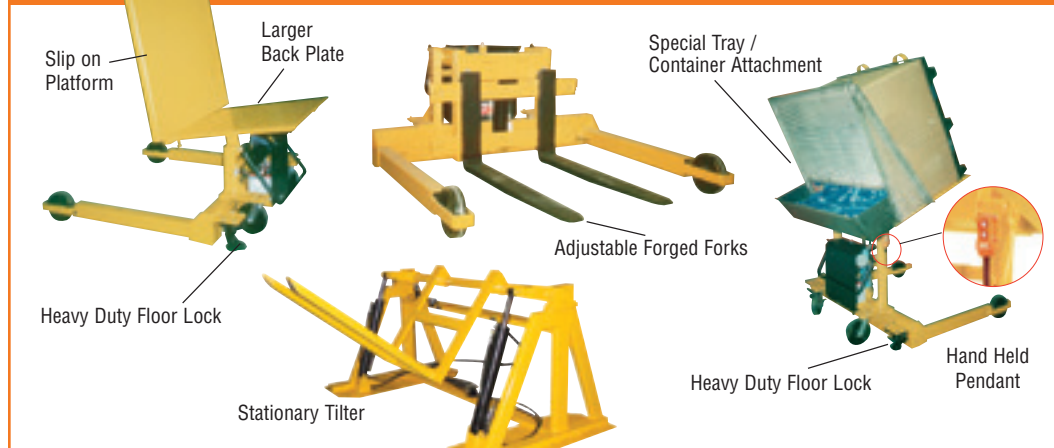

Slip on  
Platform

Larger  
Back Plate

Special Tray /  
Container Attachment

Adjustable Forged Forks

Heavy Duty Floor Lock

Stationary Tilter

Heavy Duty Floor Lock

Hand Held  
Pendant

SPECIFICATIONS		TRS 20	TRS 40 / TRS 60
Capacity	lbs.	2,000	4,000 / 6,000
A Load Centre	in.	21	20
B Lowered Height	in.	2 1/2	2 1/2
C Lift	in.	35 1/2	35 1/2
D Tilt Angle		94°	94°
E Fork Length	in.	42	42
F Fork Width - Fixed	in.	27	27
G Fork Width	in.	4	4
H Overall Length	in.	62	62
K Width	in.	50	50
L Height	in.	27 1/2	27 1/2
Weight	lbs.	650	700
Load Wheels	in.	8	8
Caster	in.	8	8





## OPTIONS

- Forks - longer/shorter, higher/ lower to 2", wider / narrower
- Adjustable Forks - 6"-36"
- Slip on Platform
- Tray Attachments
- Larger Back Plates



# POWERED TILTERS

2,000/4,000/6,000 LBS

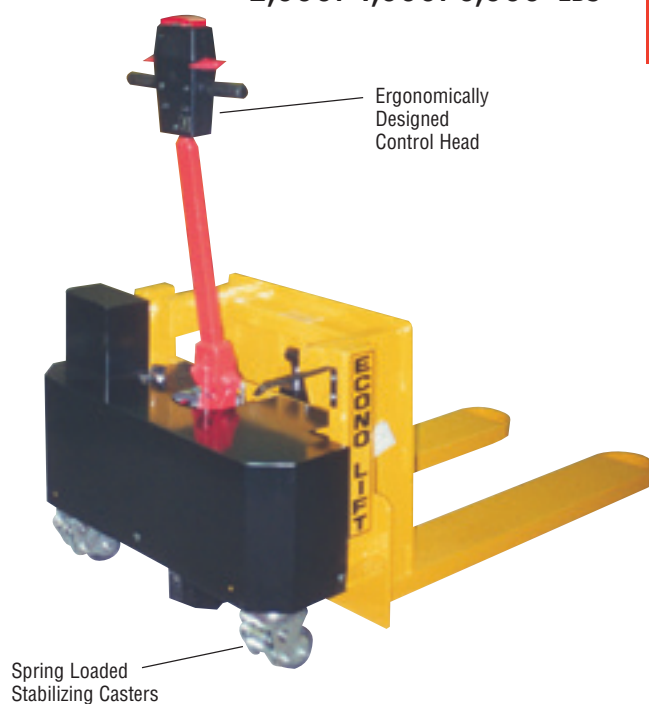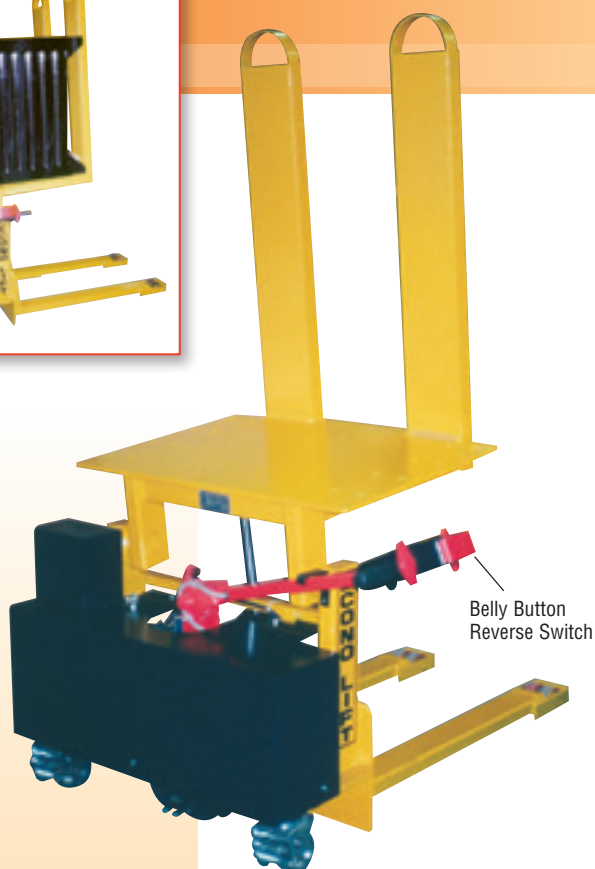

## TILT ANGLE

- 0-94 degrees

## DRIVE UNIT/ELECTRICS

- 24 volt system
- Two speeds forward and reverse
- Solenoid controlled

## CONTROL HEAD

- Butterfly switches for forward and reverse
- Push buttons for raising and lowering of tilt feature

## BRAKES

- Engaged in upper and lower position of the steering column
- Mechanical brake system

## STEERING

- 180 degree turning radius
- Handle held under bracket off to one side for closer access to container




## POWER SUPPLIES

- D/C Battery
- 24 Volt Push Button

## OPTIONS

- Forks - longer/shorter, higher / lower to 3", wider / narrower
- Tray attachment to pick parts out from
- Height of backplate at 90° can be higher or lower




## OPTIONS

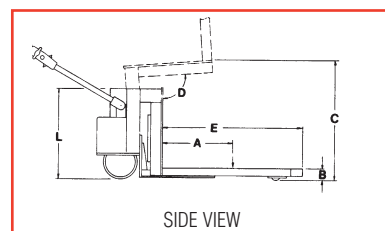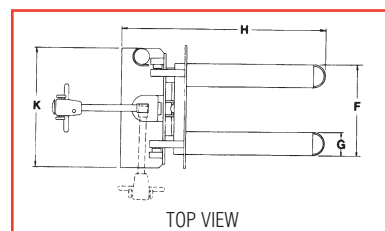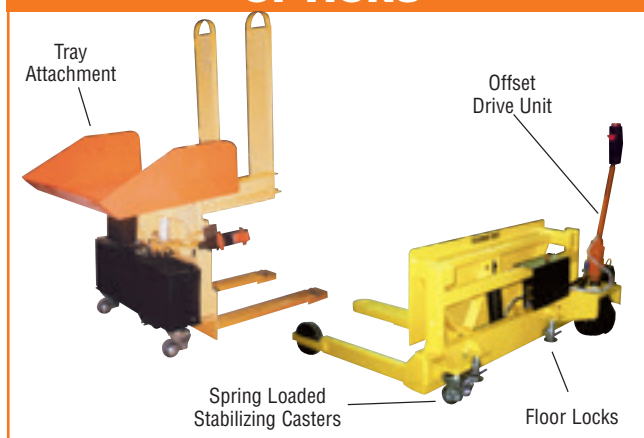

SPECIFICATIONS		PTR 20	PTR 40/PTR 60
Capacity	lbs.	2,000	4,000 / 6,000
A Load Centre	in.	17	21
B Lowered Height	in.	3 1/2	3 1/2
C Lift	in.	35 1/2	35 1/2
D Tilt Angle		94°	94°
E Fork Length	in.	34	42
F Fork Width	in.	21	27
G Fork Width	in.	6	7
H Overall Length	in.	54	62
K Width	in.	35	35
L Height	in.	27 1/2	28
Weight	lbs.	700	800
Load Wheels	in.	3 x 1 1/2	3 x 1 1/2
Caster	in.	5	5
Rubber Drive Tire	in.	10 1/2 x 3 1/2	10 1/2 x 3 1/2

# STATIONARY TILTERS

2,000/4,000/6,000 LBS

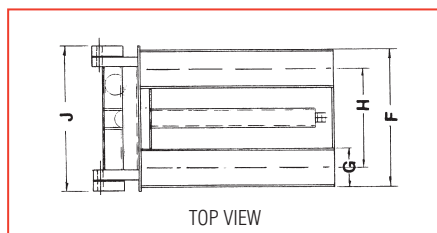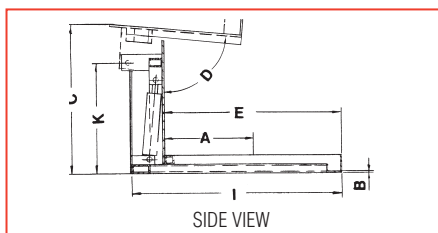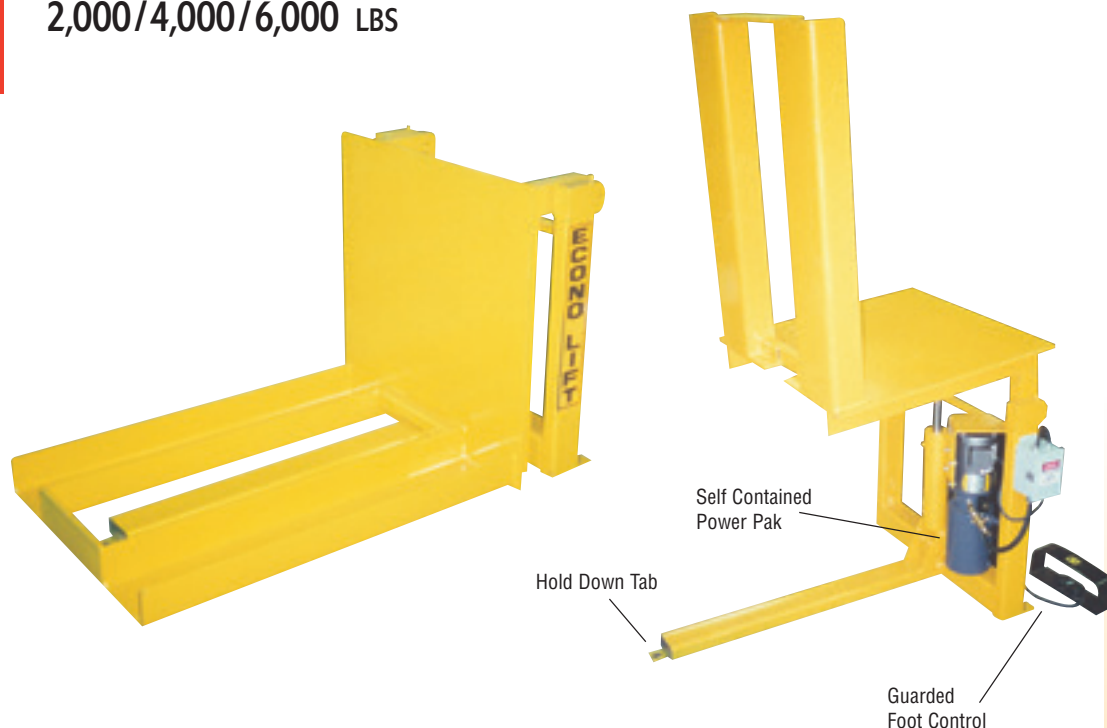

SPECIFICATIONS		STR 20	STR 40/STR 60
Capacity	lbs.	2,000	4,000 / 6,000
A	Load Centre	in.	20
B	Lowered Height	in.	5/16 c/w beveled edge
C	Lift	in.	32
D	Tilt Angle	85°	85°
E	Fork Length	in.	40
F	Fork Width	in.	29
G	Fork Width	in.	8
H	Fork Center	in.	20 1/2
I	Overall Length	in.	47
J	Width	in.	30
K	Height	in.	25
	Weight	lbs.	450

## TILT ANGLE

- 0-85°

## SAFETY

- Velocity fuse on each cylinder to eliminate tilter from collapsing due to hose failure
- Hold down tabs (3 points)

## LOWERED HEIGHT OF TILTER

- Floor level

## POWER SUPPLIES

Air/Hydraulic  
Foot Pedal  
(80 p.s.i., 20 c.f.m. min.)  
(hand held pendant optional)

## A/C 115/60/1

Hand Held or Foot  
Control (Standard)

## OPTIONS

- Tilt Angle increases or reduces

**\*NOTE:** Must be bolted into place before using



# LIGHT DUTY PORTABLE LIFTS

330/660/770/1,100/1,650 LBS

## CAPACITY

• 330/660/770/1,100/1,650 lbs.

## PLATFORM SIZES

• 24" wide x 36" long  
• 24" wide x 48" long

## BASE SIZES

• 17 1/2" wide x 36" long  
• 17 1/2" wide x 48" long

## TRAVEL

• 24" & 36"

## LOWERED HEIGHT

• 9 1/4"

ELF Lifts - see chart for above measurements

## SAFETY

• Velocity fuse on all cylinders  
• Upper limit by pass on ELF lifts

## POWER SUPPLIES

**Foot Pump** - manually powers lifts, foot release for controlled lowering.

Hand release on ELF lifts

**D/C Battery**

Hand Held Pendant c/w built-in 12 volt 6 amp charger

## MAINTENANCE

• Hinged top for easy access to power unit and cylinders  
• Self lubricated bushings on all pivot points


## OPTIONS

• Oversized platforms  
• Rotating tops  
• Bellow safety skirting

### ELF 770 DOUBLE SCISSOR LIFT



### ELF 330/660/1100/1650

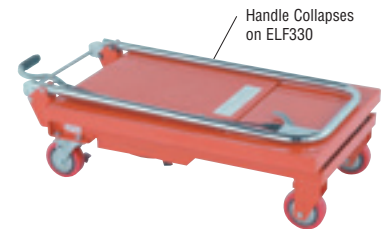


### ELF PORTABLE FOOT PUMP LIFTS MANUALLY POWERED SCISSOR LIFTS Economical Portable Lifts

MODEL NO.	CAPACITY (lbs.)	PLATFORM SIZE (W X L) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	HANDLE HT (IN.)	WHEEL (DIAM.)	OVERALL SIZE (W X L) (IN.)	STROKES TO MAX. HT
ELF330	330	17.75 X 27.5	8.75	29.5	38	4	17.75 X 36	26
ELF660	660	19.75 X 32	11	35.5	39	5	19.75 X 42	25
ELF770	770	19.75 X 32	11.25	51.5	39	5	19.75 X 42	52
ELF1100	1100	19.75 X 35.75	13.5	35.5	38	5	19.75 X 42	38
ELF1650	1650	20 X 39.25	16.5	40	39	6	20 X 53	52


### PORTABLE FOOT PUMP - MANUALLY POWERED SCISSOR LIFTS

MODEL NO.	CAPACITY (lbs.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	OVERALL DIAM. (W X L X H) (IN.)	STROKES TO MAX HT	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>									
PF24-10	1,000	24 x 36	40 x 48	9 1/4	24	33	25 x 51 x 36	1"/stroke	265
PF24-15	1,500	24 x 36	40 x 48	9 1/4	24	33	25 x 51 x 36	1"/stroke	280
<b>36" TRAVEL</b>									
PF36-10	1,000	24 x 48	40 x 60	9 1/4	36	45	25 x 63 x 45	1"/stroke	295
PF36-15	1,500	24 x 48	40 x 60	9 1/4	36	45	25 x 63 x 45	1"/stroke	315

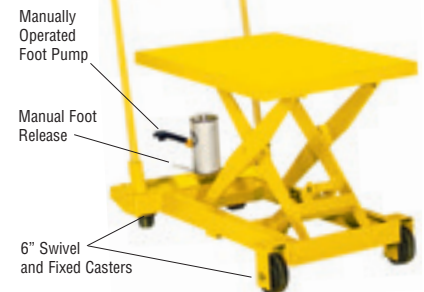

### PORTABLE D/C BATTERY POWER - HAND CONTROL SCISSOR LIFTS


MODEL NO.	CAPACITY (lbs.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	OVERALL DIAM. (W X L X H) (IN.)	SPEED TO MAX HT	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>									
PB24-10	1,000	24 x 36	40 x 48	9 1/4	24	33	25 x 51 x 36	8 seconds	325
PB24-15	1,500	24 x 36	40 x 48	9 1/4	24	33	25 x 51 x 36	14 seconds	340
<b>36" TRAVEL</b>									
PB36-10	1,000	24 x 48	40 x 60	9 1/4	36	45	25 x 63 x 45	12 seconds	355
PB36-15	1,500	24 x 48	40 x 60	9 1/4	36	45	25 x 63 x 45	18 seconds	375

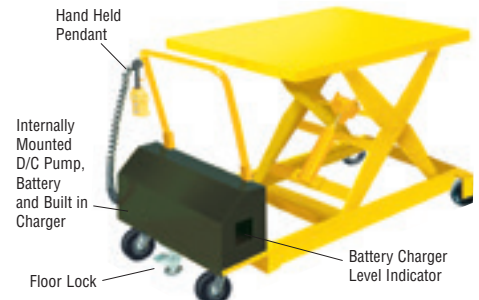

1,000/1,500 LBS


# LIGHT DUTY STATIONARY LIFTS

1,000/1,500 LBS

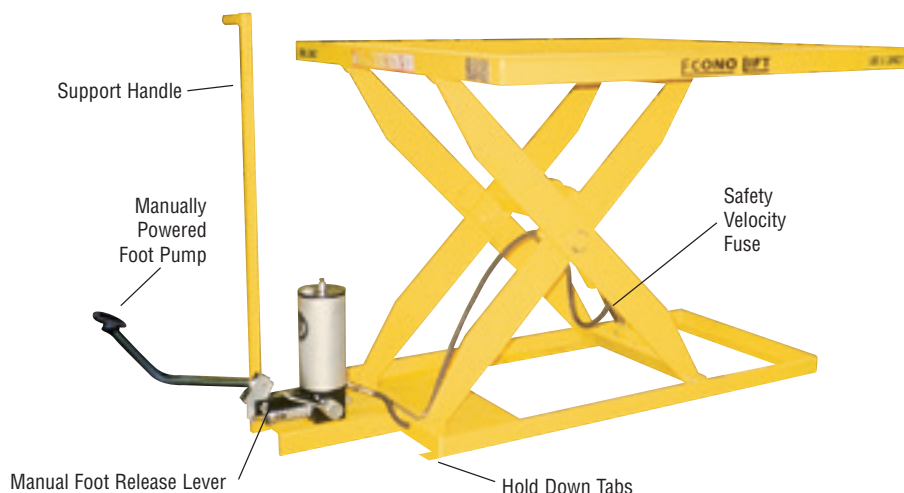

## STATIONARY FOOT PUMP - MANUALLY POWERED SCISSOR LIFTS

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	STROKES TO MAX HT	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>								
LDF24-10	1,000	24 x 36	48 x 60	5 1/2	24	29 1/2	31	290
LDF24-15	1,500	24 x 36	48 x 60	5 1/2	24	29 1/2	49	295
<b>36" TRAVEL</b>								
LDF36-10	1,000	24 x 48	48 x 72	5 1/2	36	41 1/2	40	340
LDF36-15	1,500	24 x 48	48 x 72	5 1/2	36	41 1/2	62	345

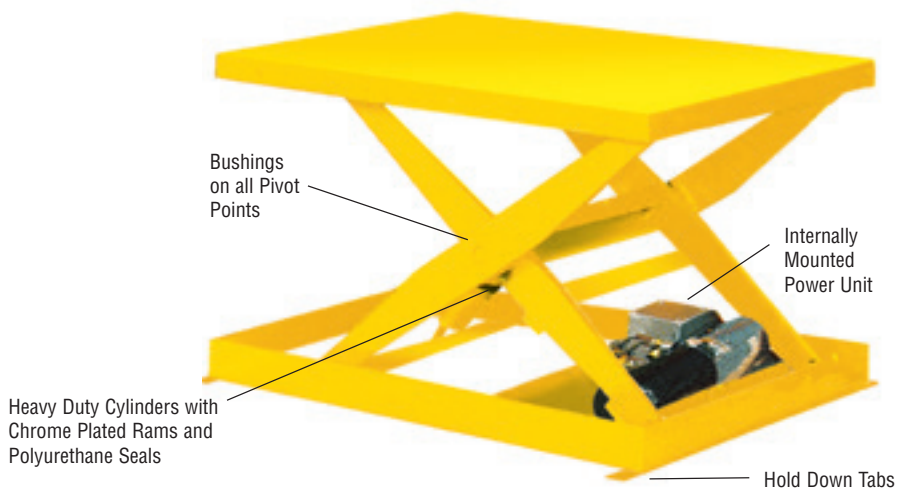

## STATIONARY A/C 110 POWER - HAND CONTROL SCISSOR LIFTS

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	RAISING TIME	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>								
LDL24-10	1,000	24 x 36	48 x 60	5 1/2	24	29 1/2	12 sec.	290
LDL24-15	1,500	24 x 36	48 x 60	5 1/2	24	29 1/2	20 sec.	295
<b>36" TRAVEL</b>								
LDL36-10	1,000	24 x 48	48 x 72	5 1/2	36	41 1/2	20 sec.	325
LDL36-15	1,500	24 x 48	48 x 72	5 1/2	36	41 1/2	28 sec.	330

### CAPACITY

- 1,000/1,500 lbs.

### PLATFORM SIZES

- 24" wide x 36" long
- 24" wide x 48" long

### BASE SIZES

- 24" wide x 36" long
- 24" wide x 48" long

### TRAVEL

- 24" & 36"

### LOWERED HEIGHT

- 5 1/2"

### SAFETY

- Velocity fuse on all cylinders

### POWER SUPPLIES

Foot Pump - manually powers lifts, foot release for controlled lowering

A/C 110 volt

Hand Control (standard)

Foot Control (optional)

Internally Mounted

A/C 460/575/3/60 volt (opt.)

Externally Mounted

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

### MAINTENANCE

- Hinged top for easy access to power unit and cylinders
- Self lubricated bushings on all pivot points

### OPTIONS

- Oversized platforms
- Rotating tops
  - spring detents
- Bellow safety skirting
- Semi-portable
- Portable



# LIFT TABLES

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS



## CAPACITY

- 2,000/3,000/4,000/  
5,000/6,000 lbs.

## PLATFORM SIZES

- 24" wide x 36" long  
to 72" wide x 96" long

## BASE SIZES

- Standard 24", 36", 48" wide  
x 36", 48", 60", 72" long

## TRAVEL

- 24", 36", 42", 48" vertical travel

## LOWERED HEIGHT

- 9" (special heights available)

## SAFETY

- Velocity fuse is standard on each cylinder
- Heavy duty hydraulic cylinders - chrome plated rod with polyurethane seals

## POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand or foot operated

A/C 460/575/3/60 volt (opt.)

Hand or foot operated

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

- Internally mounted
- Easily accessible for maintenance or repair
- Motors - Single phase 1 h.p. and three phase 1-1/2 h.p. - hand or foot operated standard

## MAINTENANCE

- Hinged table top provides easy access to power unit and cylinders
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Safety touch bars
- Semi-portable
- Portable
- Tandem lifts
- Double scissor lifts

## SPECIFICATIONS

### STANDARD 24" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 24" WIDE x 36" LONG PLATFORM/BASE</b>									
SL24-20	2,000	24 x 36	48 x 60	9	33	15	1	115/1/60	450
SL24-40	4,000	24 x 36	48 x 60	9	33	21	1	115/1/60	470
SL24-60	6,000	24 x 36	48 x 60	9	33	32	1	115/1/60	520
<b>36" TRAVEL - 24" WIDE x 48" LONG PLATFORM/BASE</b>									
SL36-20	2,000	24 x 48	48 x 72	9	45	20	1	115/1/60	600
SL36-30	3,000	24 x 48	48 x 72	9	45	30	1	115/1/60	620
SL36-40	4,000	24 x 48	48 x 72	9	45	37	1	115/1/60	650
SL36-50	5,000	24 x 48	48 x 72	9	45	40	1	208, 220, 460, 575/3/60	680
SL36-60	6,000	24 x 48	48 x 72	9	45	48	1	208, 220, 460, 575/3/60	700
<b>42" TRAVEL - 24" WIDE x 60" LONG PLATFORM/BASE</b>									
SL42-20	2,000	24 x 60	48 x 84	9	51	25	1	115/1/60	625
SL42-40	4,000	24 x 60	48 x 84	9	51	47	1	115/1/60	800
SL42-60	6,000	24 x 60	48 x 84	9	51	50	1	208, 220, 460, 575/3/60	950
<b>48" TRAVEL - 24" WIDE x 72" LONG PLATFORM/BASE</b>									
SL48-20	2,000	24 x 72	48 x 96	9	57	32	1	115/1/60	800
SL48-40	4,000	24 x 72	48 x 96	9	57	50	1	115/1/60	950
SL48-60	6,000	24 x 72	48 x 96	9	57	56	1	208, 220, 460, 575/3/60	1,200

## SPECIFICATIONS - wide based units; for wider platform applications and greater stability.

### 36" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 36" WIDE x 36" LONG PLATFORM/BASE</b>									
3SL24-20	2,000	36 x 36	60 x 60	9	33	15	1	115/1/60	480
3SL24-40	4,000	36 x 36	60 x 60	9	33	21	1	115/1/60	520
3SL24-60	6,000	36 x 36	60 x 60	9	33	32	1	115/1/60	550
<b>36" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE</b>									
3SL36-20	2,000	36 x 48	60 x 72	9	45	20	1	115/1/60	750
3SL36-40	4,000	36 x 48	60 x 72	9	45	38	1	115/1/60	790
3SL36-60	6,000	36 x 48	60 x 72	9	45	48	1	208, 220, 460, 575/3/60	850
<b>42" TRAVEL - 36" WIDE x 60" LONG PLATFORM/BASE</b>									
3SL42-20	2,000	36 x 60	60 x 84	9	51	25	1	115/1/60	830
3SL42-40	4,000	36 x 60	60 x 84	9	51	47	1	115/1/60	890
3SL42-60	6,000	36 x 60	60 x 84	9	51	50	1	208, 220, 460, 575/3/60	950
<b>48" TRAVEL - 36" WIDE x 72" LONG PLATFORM/BASE</b>									
3SL48-20	2,000	36 x 72	60 x 96	9	57	32	1	115/1/60	1,100
3SL48-40	4,000	36 x 72	60 x 96	9	57	50	1	115/1/60	1,200
3SL48-60	6,000	36 x 72	60 x 96	9	57	56	1	208, 220, 460, 575/3/60	1,280


### 48" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 48" WIDE x 36" LONG PLATFORM/BASE</b>									
4SL24-20	2,000	48 x 36	72 x 60	9	33	15	1	115/1/60	700
4SL24-40	4,000	48 x 36	72 x 60	9	33	24	1	115/1/60	740
4SL24-60	6,000	48 x 36	72 x 60	9	33	34	1	115/1/60	780
<b>36" TRAVEL - 48" WIDE x 48" LONG PLATFORM/BASE</b>									
4SL36-20	2,000	48 x 48	72 x 72	9	45	20	1	115/1/60	840
4SL36-40	4,000	48 x 48	72 x 72	9	45	38	1	115/1/60	890
4SL36-60	6,000	48 x 48	72 x 72	9	45	48	1	208, 220, 460, 575/3/60	950
<b>42" TRAVEL - 48" WIDE x 60" LONG PLATFORM/BASE</b>									
4SL42-20	2,000	48 x 60	72 x 84	9	51	26	1	115/1/60	890
4SL42-40	4,000	48 x 60	72 x 84	9	51	42	1	115/1/60	950
4SL42-60	6,000	48 x 60	72 x 84	9	51	50	1	208, 220, 460, 575/3/60	1,000
<b>48" TRAVEL - 48" WIDE x 72" LONG PLATFORM/BASE</b>									
4SL48-20	2,000	48 x 72	72 x 96	9	57	32	1	115/1/60	950
4SL48-40	4,000	48 x 72	72 x 96	9	57	50	1	115/1/60	1,100
4SL48-60	6,000	48 x 72	72 x 96	9	57	56	1	208, 220, 460, 575/3/60	1,200



See page 8 & 9 for options available.

# LIFT TABLES

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS

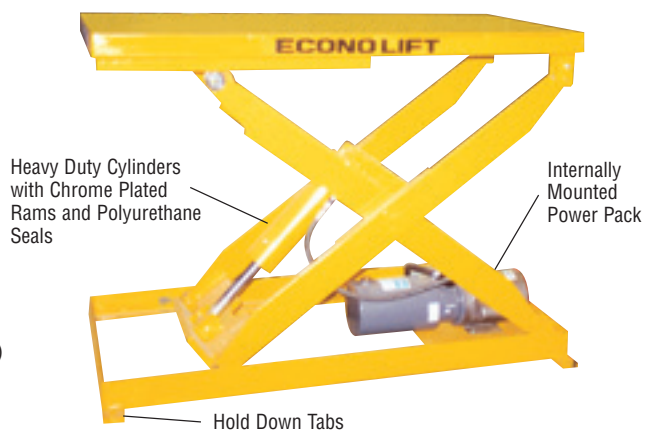

## OPTIONS AND SPECIAL APPLICATIONS


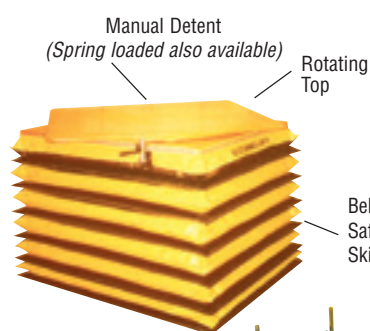


### TANDEM LIFT



### WIDE BASE LIFT TABLE

Oversize Checker Board Top

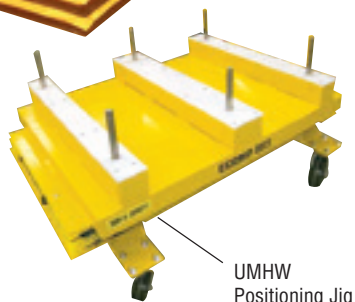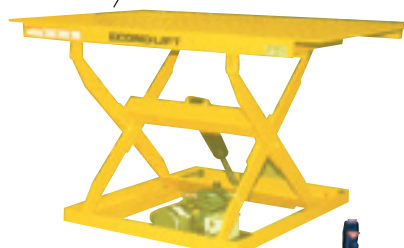


### Roller Conveyor Top



Beveled Edge for Pit Mounted Applications



### SELF PROPELLED LIFT TABLE

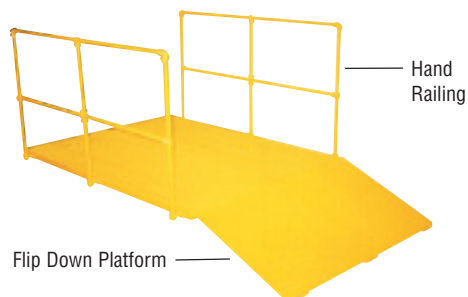

### LOADING DOCK APPLICATION



### SEMI-PORTABLE OPTION

4 Casters,  
(two swivel,  
two fixed)



### PORTABLE OPTION



# LIFT TABLES

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS

## OPTIONS & SPECIAL APPLICATIONS

### MAN LIFTS



### AGV SYSTEMS & POWER DRIVEN LIFTS




## OPTIONS & SPECIAL APPLICATIONS



# HEAVY DUTY LIFT TABLES

8,000/10,000/12,000 LBS

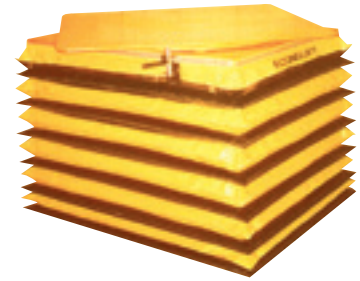

## CAPACITY

- 8,000 / 10,000 / 12,000 lbs.

## PLATFORM SIZES

- 36" wide x 48" long  
to 72" wide x 96" long

## BASE SIZES

- Standard 36", 48" wide  
x 48", 60", 72" long

## TRAVEL

- 34", 42", 48" vertical travel

## LOWERED HEIGHT

- 12"

## SAFETY

- Velocity fuse is standard on each cylinder
- Heavy duty hydraulic cylinders - chrome plated rod with polyurethane seals

## POWER SUPPLIES

A/C 220-460/3/60 volt  
& 575/3/60 volt

Hand or foot operated (standard)

- Easily accessible for maintenance or repair
- Motors - Three phase 3 h.p. hand or foot operated (standard)

## MAINTENANCE

- Hinged table top provides easy access to power unit and cylinders
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Conveyor tops, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Semi-portable
- Portable
- Fork pockets

## SPECIFICATIONS - wide based units; for wider platform applications and greater stability.

### 36" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT./ BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
<b>34" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE</b>									
3HD34-80	8,000	36 x 48	60 x 72	12	46	25	3	208, 220, 460, 575/3/60	1,600
3HD34-100	10,000	36 x 48	60 x 72	12	46	38	3	208, 220, 460, 575/3/60	1,700
3HD34-120	12,000	36 x 48	60 x 72	12	46	45	3	208, 220, 460, 575/3/60	1,750
<b>42" TRAVEL - 36" WIDE x 60" LONG PLATFORM/BASE</b>									
3HD42-80	8,000	36 x 60	60 x 84	12	54	25	3	208, 220, 460, 575/3/60	1,800
3HD42-100	10,000	36 x 60	60 x 84	12	54	42	3	208, 220, 460, 575/3/60	1,900
3HD42-120	12,000	36 x 60	60 x 84	12	54	49	3	208, 220, 460, 575/3/60	1,950
<b>48" TRAVEL - 36" WIDE x 72" LONG PLATFORM/BASE</b>									
3HD48-80	8,000	36 x 72	60 x 96	12	60	32	3	208, 220, 460, 575/3/60	2,000
3HD48-100	10,000	36 x 72	60 x 96	12	60	43	3	208, 220, 460, 575/3/60	2,100
3HD48-120	12,000	36 x 72	60 x 96	12	60	50	3	208, 220, 460, 575/3/60	2,150

### 48" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT./ BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
<b>34" TRAVEL - 48" WIDE x 48" LONG PLATFORM/BASE</b>									
4HD34-80	8,000	48 x 48	72 x 72	12	46	25	3	208, 220, 460, 575/3/60	1,800
4HD34-100	10,000	48 x 48	72 x 72	12	46	38	3	208, 220, 460, 575/3/60	1,900
4HD34-120	12,000	48 x 48	72 x 72	12	46	45	3	208, 220, 460, 575/3/60	1,950
<b>42" TRAVEL - 48" WIDE x 60" LONG PLATFORM/BASE</b>									
4HD42-80	8,000	48 x 60	72 x 84	12	54	26	3	208, 220, 460, 575/3/60	2,000
4HD42-100	10,000	48 x 60	72 x 84	12	54	42	3	208, 220, 460, 575/3/60	2,100
4HD42-120	12,000	48 x 60	72 x 84	12	54	49	3	208, 220, 460, 575/3/60	2,150
<b>48" TRAVEL - 48" WIDE x 72" LONG PLATFORM/BASE</b>									
4HD48-80	8,000	48 x 72	72 x 96	12	60	32	3	208, 220, 460, 575/3/60	2,200
4HD48-100	10,000	48 x 72	72 x 96	12	60	43	3	208, 220, 460, 575/3/60	2,300
4HD48-120	12,000	48 x 72	72 x 96	12	60	50	3	208, 220, 460, 575/3/60	2,350



# TANDEM SCISSOR LIFTS

1,000 / 2,000 / 4,000 / 6,000 / 8,000 / 10,000 / 12,000 LBS

## CAPACITY

- 1,000/2,000/4,000/6,000/8,000/10,000/12,000 lbs.

## PLATFORM SIZES

- 24" wide x 96" long to 48" wide x 240" long

## TRAVEL

- 36", 48", 60"

## LOWERED HEIGHT

- 9" & 12"

## SAFETY

- Velocity fuse is standard on each cylinder
- Safety maintenance stop included with each lift

## POWER SUPPLIES

A/C 110/1/60 volt

Hand or foot operated

A/C 460/575/3/60 volt

Hand or foot operated

Air/Hydraulic

Foot operated

Hand operated available

- Internally mounted
- Easily accessible for maintenance or repair
- Motors - Single phase 1 h.p. and three phase 1-1/2 h.p. - hand or foot operated standard

## MAINTENANCE


- Easy access to power unit and cylinders, maintenance bar provided
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops (available)
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Safety touch bars
- Semi-portable
- Portable
- 42" high hand rails with toe boards
- Diamond plate platform, ramp & flip plates



## OPTIONS & SPECIAL APPLICATIONS

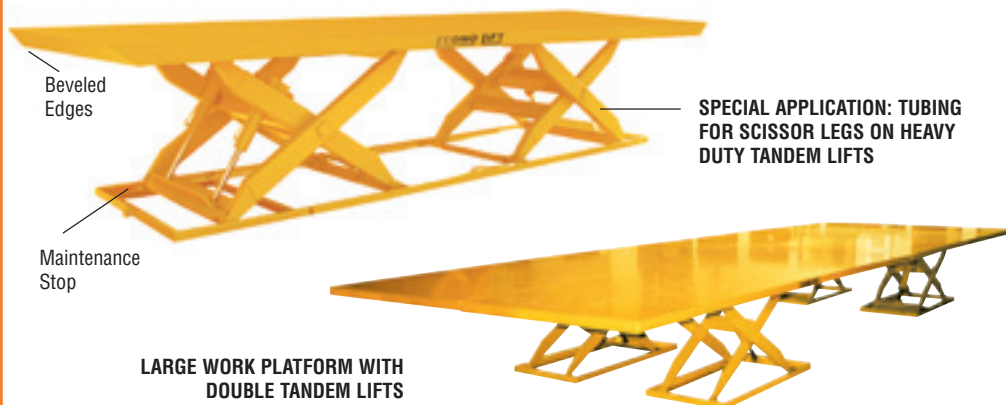

## SPECIFICATIONS - STANDARD 24" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/PH/Hz	SHIP WEIGHT (LBS)
<b>36" TRAVEL - 24" WIDE x 96" LONG PLATFORM/BASE</b>									
TSL36-10	1,000	24 x 96	48 x 144	9	45	20	1	110/1/60	920
TSL36-20	2,000	24 x 96	48 x 144	9	45	30	1	110/1/60	950
TSL36-40	4,000	24 x 96	48 x 144	9	45	40	1	110/1/60	1050
TSL36-60	6,000	24 x 96	48 x 144	9	45	35	1	208, 220, 460, 575/3/60	1100
TSL36-80	8,000	24 x 96	48 x 144	9	45	45	1	208, 220, 460, 575/3/60	1500
TSL36-100	10,000	24 x 96	48 x 144	9	45	55	1	208, 220, 460, 575/3/60	1550
TSL36-120	12,000	24 x 96	48 x 144	9	45	57	1	208, 220, 460, 575/3/60	1600
<b>48" TRAVEL - 24" WIDE x 144" LONG PLATFORM/BASE</b>									
TSL48-10	1,000	24 x 144	48 x 192	9	57	32	1	110/1/60	1100
TSL48-20	2,000	24 x 144	48 x 192	9	57	43	1	110/1/60	1200
TSL48-40	4,000	24 x 144	48 x 192	9	57	55	1	110/1/60	1300
TSL48-60	6,000	24 x 144	48 x 192	9	57	45	1	208, 220, 460, 575/3/60	1350
TSL48-80	8,000	24 x 144	48 x 192	9	57	55	1	208, 220, 460, 575/3/60	1700
TSL48-100	10,000	24 x 144	48 x 192	9	57	60	1	208, 220, 460, 575/3/60	1750
TSL48-120	12,000	24 x 144	48 x 192	9	57	62	1	208, 220, 460, 575/3/60	1800
<b>60" TRAVEL - 24" WIDE x 176" LONG PLATFORM/BASE</b>									
TSL60-10	1,000	24 x 176	48 x 224	9	69	38	1	110/1/60	1650
TSL60-20	2,000	24 x 176	48 x 224	9	69	50	1	110/1/60	1700
TSL60-40	4,000	24 x 176	48 x 224	9	69	60	1	110/1/60	1770
TSL60-60	6,000	24 x 176	48 x 224	9	69	50	1	208, 220, 460, 575/3/60	2000
TSL60-80	8,000	24 x 176	48 x 224	9	69	65	1	208, 220, 460, 575/3/60	2400
TSL60-100	10,000	24 x 176	48 x 224	9	69	78	1	208, 220, 460, 575/3/60	2500
TSL60-120	12,000	24 x 176	48 x 224	9	69	80	1	208, 220, 460, 575/3/60	2600

# DOUBLE SCISSOR LIFT TABLES

500 / 1,000 / 1,500 / 2,000 / 4,000 / 5,000 / 6,000 LBS




## LIGHT DUTY DOUBLE SCISSOR LIFT

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (LH) (IN.)	RAISED HT (TH) (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS.)
LDSL30-5-12*	500	12 x 24	12 x 24	6	36	20	1/2	115/1/60	185
LDSL30-5-16	500	16 x 24	24 x 36	6	36	20	1/2	115/1/60	210
LDSL30-10	1,000	16 x 24	24 x 36	6	36	20	1/2	115/1/60	210
LDSL36-15	1,500	16 x 36	30 x 48	6	42	25	3/4	115/1/60	220

\*Power pack external \*\*

## STANDARD 24" WIDE BASE DOUBLE SCISSOR LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (LH) (IN.)	RAISED HT (TH) (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS.)
<b>48" TRAVEL - 24" WIDE x 36" LONG PLATFORM/BASE</b>									
DSL48-10	1,000	24 x 36	48 x 60	12	60	18	1	115/1/60	625
DSL48-15	1,500	24 x 36	48 x 60	12	60	20	1	115/1/60	650
DSL48-20	2,000	24 x 36	48 x 60	12	60	30	1	115/1/60	675
DSL48-30	3,000	24 x 36	48 x 60	16	64	40	1	115/1/60	695
DSL48-40	4,000	24 x 36	48 x 60	16	64	55	1	115/1/60	725
DSL48-50	5,000	24 x 36	48 x 60	16	64	40	1	208, 220, 460, 575/3/60	750
DSL48-60	6,000	24 x 36	48 x 60	16	64	55	1	208, 220, 460, 575/3/60	780
<b>72" TRAVEL - 24" WIDE x 48" LONG PLATFORM/BASE</b>									
DSL72-10	1,000	24 x 48	48 x 72	12	84	20	1	115/1/60	850
DSL72-15	1,500	24 x 48	48 x 72	12	84	22	1	115/1/60	875
DSL72-20	2,000	24 x 48	48 x 72	12	84	32	1	115/1/60	900
DSL72-30	3,000	24 x 48	48 x 72	16	88	44	1	115/1/60	930
DSL72-40	4,000	24 x 48	48 x 72	16	88	60	1	115/1/60	975
DSL72-50	5,000	24 x 48	48 x 72	16	88	49	1	208, 220, 460, 575/3/60	1,000
DSL72-60	6,000	24 x 48	48 x 72	16	88	57	1	208, 220, 460, 575/3/60	1,050

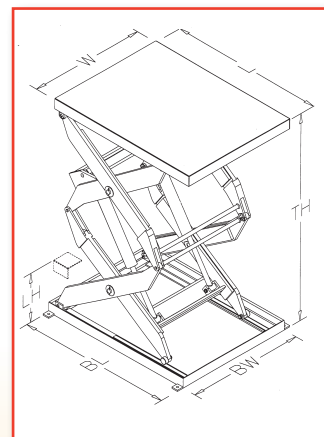

## OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Semi-portable
- Portable

**SPECIFICATIONS** - wide based units; for wider platform applications and greater stability.

## 36" WIDE BASE DOUBLE SCISSOR LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (LH) (IN.)	RAISED HT (TH) (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS.)
<b>48" TRAVEL - 36" WIDE x 36" LONG PLATFORM/BASE</b>									
3DSL48-10	1,000	36 x 36	60 x 60	12	60	18	1	115/1/60	650
3DSL48-15	1,500	36 x 36	60 x 60	12	60	20	1	115/1/60	675
3DSL48-20	2,000	36 x 36	60 x 60	12	60	30	1	115/1/60	700
3DSL48-30	3,000	36 x 36	60 x 60	16	64	40	1	115/1/60	725
3DSL48-40	4,000	36 x 36	60 x 60	16	64	55	1	115/1/60	750
3DSL48-50	5,000	36 x 36	60 x 60	16	64	40	1	208, 220, 460, 575/3/60	775
3DSL48-60	6,000	36 x 36	60 x 60	16	64	55	1	208, 220, 460, 575/3/60	800
<b>72" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE</b>									
3DSL72-10	1,000	36 x 48	60 x 72	12	84	20	1	115/1/60	875
3DSL72-15	1,500	36 x 48	60 x 72	12	84	22	1	115/1/60	900
3DSL72-20	2,000	36 x 48	60 x 72	12	84	32	1	115/1/60	925
3DSL72-30	3,000	36 x 48	60 x 72	16	88	44	1	115/1/60	950
3DSL72-40	4,000	36 x 48	60 x 72	16	88	60	1	115/1/60	995
3DSL72-50	5,000	36 x 48	60 x 72	16	88	49	1	208, 220, 460, 575/3/60	1,050
3DSL72-60	6,000	36 x 48	60 x 72	16	88	57	1	208, 220, 460, 575/3/60	1,095

## 48" WIDE BASE DOUBLE SCISSOR LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (LH) (IN.)	RAISED HT (TH) (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS.)
<b>48" TRAVEL - 48" WIDE x 36" LONG PLATFORM/BASE</b>									
4DSL48-10	1,000	48 x 36	72 x 60	12	60	18	1	115/1/60	875
4DSL48-15	1,500	48 x 36	72 x 60	12	60	20	1	115/1/60	900
4DSL48-20	2,000	48 x 36	72 x 60	12	60	30	1	115/1/60	925
4DSL48-30	3,000	48 x 36	72 x 60	16	64	40	1	115/1/60	950
4DSL48-40	4,000	48 x 36	72 x 60	16	64	55	1	115/1/60	995
4DSL48-50	5,000	48 x 36	72 x 60	16	64	40	1	208, 220, 460, 575/3/60	1,050
4DSL48-60	6,000	48 x 36	72 x 60	16	64	55	1	208, 220, 460, 575/3/60	1,095
<b>72" TRAVEL - 48" WIDE x 48" LONG PLATFORM/BASE</b>									
4DSL72-10	1,000	48 x 48	72 x 72	12	84	20	1	115/1/60	1,050
4DSL72-15	1,500	48 x 48	72 x 72	12	84	22	1	115/1/60	1,100
4DSL72-20	2,000	48 x 48	72 x 72	12	84	32	1	115/1/60	1,195
4DSL72-30	3,000	48 x 48	72 x 72	16	88	44	1	115/1/60	1,295
4DSL72-40	4,000	48 x 48	72 x 72	16	88	60	1	115/1/60	1,400
4DSL72-50	5,000	48 x 48	72 x 72	16	88	49	1	208, 220, 460, 575/3/60	1,450
4DSL72-60	6,000	48 x 48	72 x 72	16	88	57	1	208, 220, 460, 575/3/60	1,495




# DOUBLE SCISSOR LIFT TABLES

500/1,000/1,500/2,000/3,000/4,000/5,000/6,000 LBS

LIFT & TILTS



Heavy Duty Cylinders with  
Chrome Plated Rams and  
Polyurethane Seals

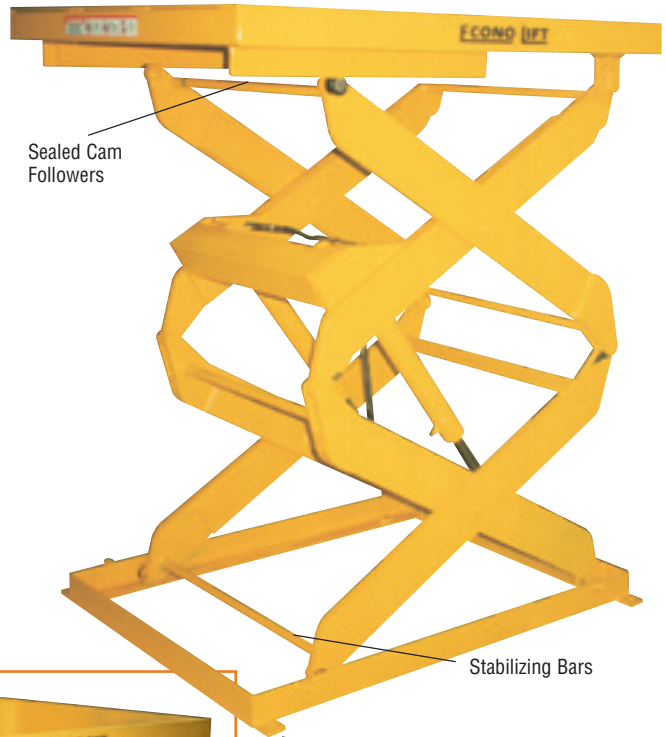

Sealed Cam  
Followers

Stabilizing Bars

Hold Down Tabs



## CAPACITY

- 1,000/1,500/2,000/3,000/  
4,000/5,000/6,000 lbs.

## PLATFORM SIZES

- 24" wide x 36" long  
to 72" wide x 72" long

## BASE SIZES

- Standard 24", 36", 48" wide  
x 36", 48" long

## TRAVEL

- 48", 72" vertical travel

## LOWERED HEIGHTS

- 12", 18"

## SAFETY

- Velocity fuse is standard on  
each cylinder
- Heavy duty hydraulic  
cylinders - chrome plated rod  
with polyurethane seals

## POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand or foot operated

A/C 460/575/3/60 volt (opt.)

Hand or foot operated

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

- Internally mounted
- Easily accessible for  
maintenance or repair
- Motors - Single phase 1 h.p.  
and three phase 1-1/2 h.p. -  
hand or foot operated  
standard

## MAINTENANCE

- Hinged table top provides  
easy access to power unit  
and cylinders
- Self lubricated bronze  
bushings on all wear points

## OPTIONS & SPECIAL APPLICATIONS

Portable D/C Battery  
Double Scissor Lift



Rotating Top




Different Sized  
Platforms/Bases

"V" Plate Double  
Scissor Lift



Ball Transfer Top  
(Conveyers available)




Bellow Safety  
Skirting



Triple Scissor Lift  
with Round Top



Quad Scissor Lift




Movable Top

Double  
Scissor Lift

# MECHANICAL GRAVITY FILTERS

1,000/2,000/4,000 LBS

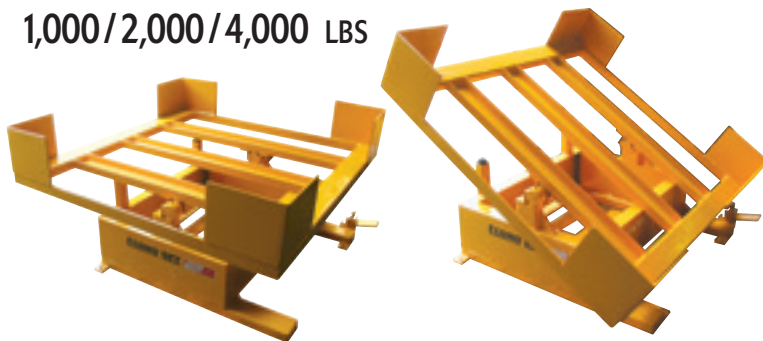

## OPTIONS



## MECHANICAL GRAVITY FILTER

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE (W x D) (IN.)	PLATFORM HEIGHT (IN.)	TILT ANGLE	WEIGHT (LBS.)
<b>MECHANICAL GRAVITY FILTER</b>					
MGT10	1,000	50 x 50	18"	30°	500
MGT20	2,000	50 x 50	18"	30°	550
MGT40	4,000	50 x 50	18"	30°	600

## CAPACITY

- 1,000/2,000/4,000 lbs.

## TILT ANGLE

- 0-30 degrees (standard)

## LOWERED HEIGHT

- 18"

## POWER SUPPLIES

Manual

## OPTIONS

- Larger or smaller sizes available

# TILT TABLES

1,000/2,000/4,000/6,000 LBS



## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## TILT ANGLE

- 0-45 degrees (standard)

## FRONT RETAINING LIP

- 8" high (standard)

## SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing due to hose failure
- Hold down tabs on all four corners

## LOWERED HEIGHT

- 9"

## POWER SUPPLIES

A/C 110/1/60 volt

Hand or foot operated (standard)

A/C 220/460/575/3/60

Hand or foot operated (optional)

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

## SAFETY


- Bellow safety skirting
- Safety tape switch
- Retaining lip - larger or smaller
- Conveyor or ball transfer tops

## OPTIONS

- Platforms: larger or smaller
- Tilt Angle: increased or restricted
- Mounted on carousel

## OPTIONS & SPECIAL APPLICATIONS

### OVERSIZE PLATFORM




### LIFT AND/OR TILT TABLE



### LIGHT DUTY APPLICATION




### Larger Front Retaining Plate



### TILT TABLE MOUNTED ON A CAROUSEL



### 90° Tilt Angle



### ROLLER CONVEYOR

### Bellow Safety Skirting

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE (W x D) (IN.)	MAXIMUM PLATFORM SIZE (W x D)	TILT ANGLE	RAISING TIME (seconds)	WEIGHT (LBS.)
<b>24" WIDE TILT TABLES</b>						
TRT-1-2436	1,000	24 x 36	48 x 48	45°	15	250
TRT-2-2436	2,000	24 x 36	48 x 48	45°	18	380
TRT-4-2436	4,000	24 x 36	48 x 48	45°	20	410
TRT-6-2436	6,000	24 x 36	48 x 48	45°	22	430
<b>50" WIDE TILT TABLES</b>						
TRT-1-5050	1,000	50 x 50	72 x 72	45°	18	320
TRT-2-5050	2,000	50 x 50	72 x 72	45°	23	450
TRT-4-5050	4,000	50 x 50	72 x 72	45°	25	490
TRT-6-5050	6,000	50 x 50	72 x 72	45°	30	580



# LIFT/TILT TABLES

1,000/2,000/4,000 LBS

8" high front retaining lip c/w side gussets.

Lift and tilt, integrated as one unit (not two separate machines put together).

All Pivot and Wear Points Have Bronze Self Lubricating Bushings

Internally Mounted Power Pack (for A/C units only)

LIFT & TILTS



## CAPACITY

- 1,000/2,000/4,000 lbs.

## SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing due to hose failure

## TILT ANGLE

- 0-30/45 degrees

## LOWERED HEIGHT

- 12"

## TRAVEL

- 24", 36", 42"

## FRONT RETAINING LIP

- 8" high (standard)

## POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand or foot operated

A/C 460/575/3/60 volt (opt.)

Hand or foot operated

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

## OPTIONS

- Platforms: wider or deeper
- Bellow safety skirting
- Stainless steel, galvanized or 'steel-it' painted units
- Lift/tilt: reduced or increased

## OPTIONS & SPECIAL APPLICATIONS

LIFT TILT  
with Bellows  
and Conveyor

LIFT AND TILT  
with Ball Transfers  
and Conveyor

DUAL TILT

Larger Platforms  
6,000 lbs.  
Capacity  
(3 cylinders)  
Wider and Longer Base

Wider and Longer Base

Captured Cam  
Followers

Lift Table  
with Upender

Greater than 90  
degrees Up Tilt

Custom Platforms

360° Rotation

Bellow  
Safety  
Skirting

90° Tilt Angle

Captured  
Rollers

Steel-It Finish (food-grade,  
alternative to Stainless Steel)

Multi-directional  
Clamp

HEAVY DUTY  
LIFT - UPENDER

Oversized  
Platforms

Internally  
Mounted  
Power Pack  
(standard)

MODEL NO.	CAPACITY (lbs.)	LOW'D HEIGHT (IN.)	TRAVEL (IN.)	TOTAL HEIGHT (IN.)	STANDARD PLATFORM AND BASE (W x D) (IN.)	OVERSIZED PLATFORM UP TO (W x D) (IN.)	UP SPEED APPROX	MOTOR H.P.
<b>24" TRAVEL - 48" x 36" (W x D) PLATFORM - TILT ANGLE 0 - 30°</b>								
TR-SL 24-10	1,000	12	24	36	48 x 36	60 x 60	15	1
TR-SL 24-20	2,000	12	24	36	48 x 36	60 x 60	21	1
TR-SL 24-40	4,000	12	24	36	48 x 36	60 x 60	30	1 1/2
<b>36" TRAVEL - 48" x 48" (W x D) PLATFORM - TILT ANGLE 0 - 45°</b>								
TR-SL 36-10	1,000	12	36	48	48 x 48	72 x 72	20	1
TR-SL 36-20	2,000	12	36	48	48 x 48	72 x 72	30	1
TR-SL 36-40	4,000	12	36	48	48 x 48	72 x 72	35	1 1/2
<b>42" TRAVEL - 60" x 48" (W x D) PLATFORM - TILT ANGLE 0 - 45°</b>								
TR-SL 42-10	1,000	12	42	54	60 x 48	84 x 72	25	1
TR-SL 42-20	2,000	12	42	54	60 x 48	84 x 72	35	1
TR-SL 42-40	4,000	12	42	54	60 x 48	84 x 72	45	1 1/2

# SELF PROPELLED LIFT TABLES

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS



## CAPACITY

- 2,000/3,000/4,000/5,000/6,000 lbs.

## PLATFORM SIZES

- 24" wide x 36" long to 60" wide x 96" long

## BASE SIZES

- Standard 24, 36" wide x 36", 48", 60", 72" long

## TRAVEL

- 24", 36", 42", 48" vertical travel

## LOWERED HEIGHT OF LIFT TABLE

- 12"

## SAFETY

- Velocity fuse is standard on each cylinder
- Heavy duty hydraulic cylinders - chrome plated rod with polyurethane seals
- Horn in control head

## MAINTENANCE

- Hinged table top provides easy access to power unit and cylinders
- Self lubricated bronze bushings on all wear points
- Easy removable cover

## LIFT TABLE OPTIONS

- Oversized platforms
- Rotating tops - spring detents - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Safety touch bars

## DRIVE UNIT/ELECTRICS

- 24 volt system
- Variable speed control - forward/reverse
- Built in 24 volt charger

## CONTROL HEAD

- Butterfly switches for forward and reverse
- Push buttons for raising and lowering of forks
- Built in horn

## BRAKES

- Engaged in upper thru lower position of the steering column when power is turned off
- Electro-mechanical brake system

## STEERING

- 180 degree turning radius
- Handle ergonomically designed

## POWER SUPPLIES

- D/C Battery 24 volt push button

## OPTIONS

- Longer Forks
- Industrial battery
- Industrial charger
- Battery discharge indicator
- Hour meter

## OPTIONS & SPECIAL APPLICATIONS



**POWERED PORTABLE**  
with Differential Drive



**SIDE LOADING  
POWERED LIFT  
TABLE**



## SPECIFICATIONS - STANDARD 24" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 24" WIDE x 36" LONG PLATFORM/BASE</b>							
PLT24-20	2,000	24 x 36	48 x 60	12	36	15	600
PLT24-40	4,000	24 x 36	48 x 60	12	36	21	620
PLT24-60	6,000	24 x 36	48 x 60	12	36	32	670
<b>36" TRAVEL - 24" WIDE x 48" LONG PLATFORM/BASE</b>							
PLT36-20	2,000	24 x 48	48 x 72	12	48	17	750
PLT36-30	3,000	24 x 48	48 x 72	12	48	30	770
PLT36-40	4,000	24 x 48	48 x 72	12	48	37	800
PLT36-50	5,000	24 x 48	48 x 72	12	48	42	830
PLT36-60	6,000	24 x 48	48 x 72	12	48	45	850
<b>48" TRAVEL - 24" WIDE x 72" LONG PLATFORM/BASE</b>							
PLT48-20	2,000	24 x 72	48 x 96	12	60	32	1000
PLT48-40	4,000	24 x 72	48 x 96	12	60	48	1150
PLT48-60	6,000	24 x 72	48 x 96	12	60	54	1200

## WIDE BASED UNITS for wider platform applications and greater stability.

### 36" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	SHIP WEIGHT (LBS)
<b>24" TRAVEL - 36" WIDE x 36" LONG PLATFORM/BASE</b>							
3PLT24-20	2,000	36 x 36	60 x 60	12	36	15	680
3PLT24-40	4,000	36 x 36	60 x 60	12	36	21	720
3PLT24-60	6,000	36 x 36	60 x 60	12	36	32	750
<b>36" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE</b>							
3PLT36-20	2,000	36 x 48	60 x 72	12	48	17	950
3PLT36-40	4,000	36 x 48	60 x 72	12	48	30	990
3PLT36-60	6,000	36 x 48	60 x 72	12	48	37	1050
<b>48" TRAVEL - 36" WIDE x 72" LONG PLATFORM/BASE</b>							
3PLT48-20	2,000	36 x 72	60 x 96	12	60	32	1300
3PLT48-40	4,000	36 x 72	60 x 96	12	60	48	1400
3PLT48-60	6,000	36 x 72	60 x 96	12	60	54	1480



# HAND PUMP/BATTERY SKID LIFTS

- Quick lift for loads under 330 lbs.
- Normal lift for loads over 330 lbs.
- Front support legs with adjustable stabilizers that contact the floor when forks are 16.5" above the floor
- Telescopic cylinder gives better safer lines

## LIFT HEIGHT

- 32"

## LOWERED HEIGHT

- 3.4"

## FORK DIMENSIONS

- 21" or 27" wide x 45" long

## SAFETY

- Front support legs and adjustable stabilizers contacts floor automatically at 16.5"

## POWER SUPPLIES

- Hand Pump
- D/C 12v battery

## OPTIONS

- Platforms available



HPSL



BPSL

2,200 / 3,300 LBS



LIFT & TILTS

### HAND PUMP SKID LIFTS (HPSL)

MODEL NO.	CAPACITY (LBS.)	WEIGHT LIFT/STROKE	LIFT HEIGHT (IN.)	MIN. FORK HEIGHT (IN.)	O.A. FORK WIDTH (IN.)	O.A. FORK LENGTH (IN.)	LOAD WHEEL	STEERING WHEEL	WEIGHT (LBS.)
<b>HAND PUMP SKID LIFTS</b>									
HPSL22	2200	up to 330 lbs. - 1"/stroke	32	3.4	21 or 27	45	2.75" DIA.	6"	246
HPSL33	3300	330 lbs.+ - .41"/stroke	32	3.4	21 or 27	45	2.75" DIA.	6"	275

### BATTERY SKID LIFTS (BPSL)

MODEL NO.	CAPACITY (LBS.)	BATTERY	LIFT HEIGHT (IN.)	MIN. FORK HEIGHT (IN.)	O.A. FORK WIDTH (IN.)	O.A. FORK LENGTH (IN.)	LOAD WHEEL	STEERING WHEEL	WEIGHT (LBS.)
<b>BATTERY SKID LIFTS</b>									
BPSL22	2200	12V	32	3.4	21 or 27	45	2.75" DIA.	6"	323
BPSL33	3300	12V	32	3.4	21 or 27	45	2.75" DIA.	6"	345

# SELF PROPELLED PORTABLE SKID LIFTS

## DRIVE UNIT/ELECTRICS

- 24 volt system
- Variable speed control - forward/reverse
- Built in 24 volt charger

## CONTROL HEAD

- Butterfly switches for forward and reverse
- Push buttons for raising and lowering of forks
- Built in horn

## BRAKES

- Engaged in upper thru lower position of the steering column when power is turned off
- Electro-mechanical brake system

## STEERING


- 180 degree turning radius
- Handle ergonomically designed

## POWER SUPPLIES

- D/C Battery 24 volt

## OPTIONS

- Longer Forks
- Industrial battery
- Industrial charger
- Battery discharge indicator
- Hour meter

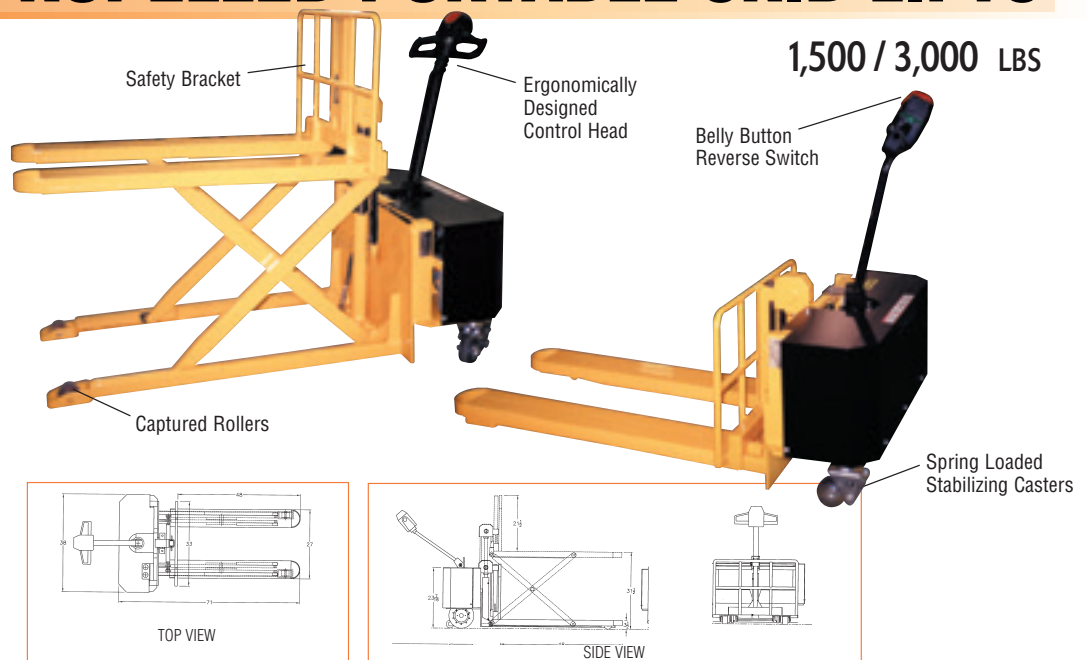


1,500 / 3,000 LBS

### SELF PROPELLED PORTABLE SKID LIFT

MODEL NO.	CAPACITY (LBS.)	FORK DIMENSIONS (W X L) (IN.)	FORK HEIGHTS (IN.)		WEIGHT (LBS.)
			LOWERED	RAISED	
PPSL-15B	1,500	27 x 48	3.5	31.5	600
PPSL-30B	3,000	27 x 48	3.5	31.5	800

# LOADING DOCKS

5,000 / 6,000 / 8,000 / 10,000 / 12,000 LBS

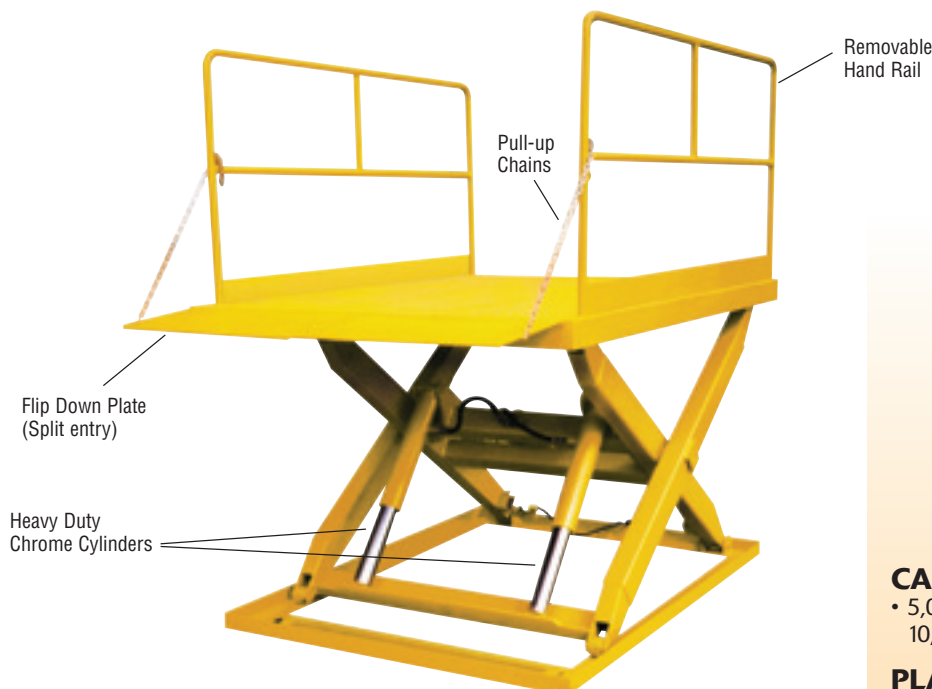

## SPECIFICATIONS - 72" PLATFORM WIDTH

MODEL NO.	CAPACITY (LBS.)	LOWERED HEIGHT (IN.)	VERTICAL TRAVEL (IN.)	BASE FRAME (IN.)	MOTOR (H.P.)	APPROX. LIFT TIME (SEC.)	APPROX. WEIGHT (LBS.)
<b>STANDARD PLATFORM SIZE 72" WIDE X 96" LONG</b>							
LD-5-7296	5,000	9	59	66 X 92	1	100	2,280
LD-6-7296	6,000	12	59	66 X 92	1	120	2,400
LD-8-7296	8,000	12	59	66 X 92	3	55	3,259
LD-10-7296	10,000	12	59	66 X 92	3	70	3,800
LD-12-7296	12,000	14	59	68 X 93	5	54	4,100
<b>STANDARD PLATFORM SIZE 72" WIDE X 120" LONG</b>							
LD-5-72120	5,000	9	59	66 X 92	1	100	2,500
LD-6-72120	6,000	12	59	66 X 92	1	120	2,600
LD-8-72120	8,000	12	59	66 X 92	3	55	3,400
LD-10-72120	10,000	12	59	66 X 92	3	70	4,500
LD-12-72120	12,000	14	59	68 X 114	5	54	6,200
<b>STANDARD PLATFORM SIZE 72" WIDE X 144" LONG</b>							
LD-12-72144	12,000	14	59	68 X 138	5	54	7,200

## SPECIFICATIONS - 96" PLATFORM WIDTH

MODEL NO.	CAPACITY (LBS.)	LOWERED HEIGHT (IN.)	VERTICAL TRAVEL (IN.)	BASE FRAME (IN.)	MOTOR (H.P.)	APPROX. LIFT TIME (SEC.)	APPROX. WEIGHT (LBS.)
<b>STANDARD PLATFORM SIZE 96" WIDE X 96" LONG</b>							
LD-5-9696	5,000	9	59	68 X 93	1	100	2,500
LD-6-9696	6,000	10	59	68 X 93	1	120	3,000
LD-8-9696	8,000	14	59	68 X 93	3	55	3,520
LD-10-9696	10,000	14	59	68 X 93	3	70	4,500
LD-12-9696	12,000	14	59	89 X 93	5	54	5,200
<b>STANDARD PLATFORM SIZE 96" WIDE X 120" LONG</b>							
LD-5-96120	5,000	9	59	68 X 93	1	100	2,800
LD-6-96120	6,000	10	59	68 X 93	1	120	3,400
LD-8-96120	8,000	14	59	68 X 93	3	55	3,900
LD-10-96120	10,000	14	59	68 X 93	3	70	4,200
LD-12-96120	12,000	14	59	89 X 114	5	54	6,900
<b>STANDARD PLATFORM SIZE 96" WIDE X 144" LONG</b>							
LD-12-96144	12,000	14	59	89 X 138	5	54	7,400

### CAPACITY

- 5,000 / 6,000 / 8,000 / 10,000 / 12,000 lbs.

### PLATFORM

- Checker plate
- Split plate
- 18" high x 68" wide

### BASE SIZES

- Standard 66", 68, 89" wide x 92", 93", 114, 138" long

### TRAVEL

- 59"

### LOWERED HEIGHT OF LOADING DOCK

- Consult chart

### POWER SUPPLY

A/C 220/460/575 volt  
3 Phase (standard\*)

\* 5,000/6,000 lb. units use 1 H.P. single phase motors

- Three phase motors (hand operated controls standard)
- 10' Hose and cables
- Different HP available (ie. 7/10)

### OPTIONS

- Different platform sizes
- Bellow safety skirting / safety touch bars / beveled edge
- Limit switches / photo eyes
- Eye bolts - for moving lifts easily
- Semi-portable c/w dolly handle



# LOW PROFILE SCISSOR LIFTS

## CAPACITY

- 500/1,000/2,000/4,000 lbs.

## PLATFORM SIZES

- 24" wide x 48" long to 72" wide x 72" long

## BASE SIZES

- 24" wide x 48" wide and x 48" wide x 48" wide

## TRAVEL

- 29"

## LOWERED HEIGHTS

- 4.3"

## SAFETY

- Velocity fuses
- Pressure compensated flow divider

## POWER SUPPLIES

- External A/C 110 volt power (standard)
- Hand or covered foot control


## MAINTENANCE

- Hinged top for easy access
- Self lubricated bushings on all pivot points

## OPTIONS


- Oversized platforms
- Rotating tops
- Electric toe guards
- Safety tape switch
- Conveyors
- Bellow skirting

Heavy Duty Cylinders with Chrome Plated Rams and Polyurethane Seals

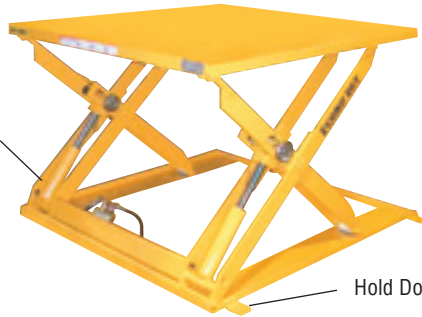

Hold Down Tabs

500 / 1,000 / 2,000 / 4,000 LBS



External Low Profile Power Pack (hand or foot control)

## OPTIONS & SPECIAL APPLICATIONS



## SPECIFICATIONS - STANDARD WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HEIGHT (IN.)	H.P.	VOLT/PH/HZ	SHIP WEIGHT
<b>STANDARD 24" WIDE BASE LIFT TABLES</b>									
LP29-5	500	24 x 48	48 x 72	4.3	29	33.3	1	110/1/60	325
LP29-10	1000	24 x 48	48 x 72	4.3	29	33.3	1	110/1/60	350
LP29-20	2000	24 x 48	48 x 72	4.3	29	33.3	1	110/1/60	550
LP29-40	4000	24 x 48	48 x 72	4.3	29	33.3	1	110/1/60	650
<b>STANDARD 48" WIDE BASE LIFT TABLES</b>									
4LP29-5	500	48 x 48	72 x 72	4.3	29	33.3	1	110/1/60	350
4LP29-10	1000	48 x 48	72 x 72	4.3	29	33.3	1	110/1/60	375
4LP29-20	2000	48 x 48	72 x 72	4.3	29	33.3	1	110/1/60	575
4LP29-40	4000	48 x 48	72 x 72	4.3	29	33.3	1	110/1/60	700

# LOW PROFILE LOADING DOCK

5,000 LBS

## CAPACITY

- 5000 lbs.

## PLATFORM/BASE SIZES

- 72" wide x 96" long diamond tread plate

## TRAVEL

- 54

## LOWERED HEIGHT

- 6"

## SAFETY

- Velocity fuse on all cylinders
- Pressure compensated flow divider
- Safety chain across both ends and attached to flip plates

## RAILS


- 42" high removable handrails with midrail and kick plate

## SPLIT FLIP PLATES

- 24" H x 68" W & 36" H x 68" W


## POWER

- 460/3/60 - hand control

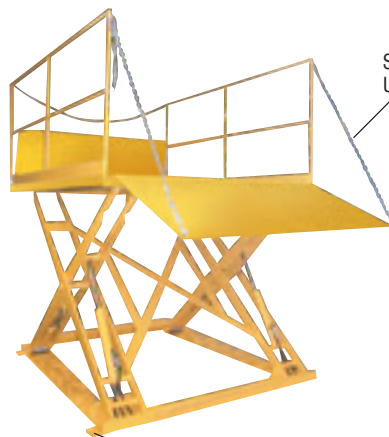

Safety Pull Up Chains

Hold Down Tabs

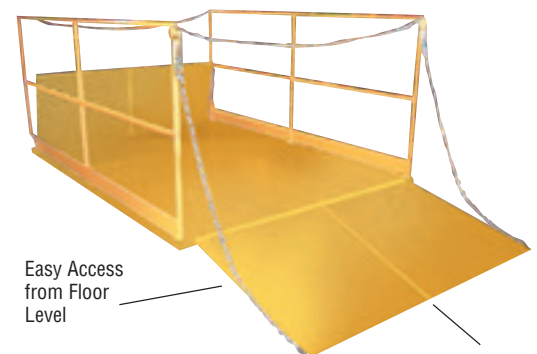

Easy Access from Floor Level

Split Entry Plates

## LOW PROFILE LOADING DOCKS

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE (W x H) (IN.)	LOW HT. (IN.)	TRAVEL (IN.)	TOTAL HEIGHT (IN.)	VOLT/PH/HZ	SHIP WEIGHT (LBS.)
LPD54-50	5000	72 x 96	6	54	60	220-460-575/3/60	2600


# SPRING TABLES

400 - 4,500 LBS



SPT45

## OPTIONS

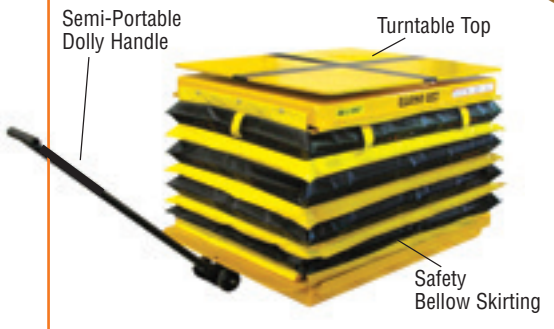

## SPRING TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE wide x length (W X D) (IN.)	OVERSIZED PLATFORM (UP TO) (IN.)	LOW HEIGHT (LH) (IN.)	TRAVEL (IN.)	RAISED HT (RH) (IN.)	# OF SPRINGS	SHIPPING WT (LBS)
<b>BASE SIZE: 32" WIDE x 48" LONG</b>								
SPT45	400 - 4500	32 x 48	54 X 54	10	20	30	2	650

## CAPACITY

- 400 - 4,500 lbs.

## PLATFORM SIZES

- 32" wide x 48" long to 54" wide x 54" long

## BASE SIZES

- Standard 32" wide x 48" long

## TRAVEL

- 20" vertical travel

## LOWERED HEIGHT

- 10"

## SAFETY

- Captured rollers

## POWER SUPPLY

- Spring powered

## MAINTENANCE

- Hinged table top provides easy access to springs
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Corner gussets
- Rotating tops
  - spring and manual detents
- Bellow safety skirting
- Semi-portable
- Portable
- Motion stabilizer
- Fork pockets

# BATTERY WINCH STACKERS with FIXED PLATFORM

220 / 330 LBS



BWS220P  
BWS330P

- Manual winch and battery models available
- Available in adjustable fork and platform models
- Well designed light weight construction
- Very maneuverable
- Suitable for warehouses, retail, manufacturing, offices, any narrow applications, etc...

## CAPACITY

- 220/330 lbs.

## LIFT HEIGHT

- 59" / 67"

## LOWERED HEIGHT

- 5.2"

## SAFETY

- Brake on caster

## OPTIONS

- Spindle attachment
- Double spindle
- Reel rotator
- "V" cradle
- Other options available
- please consult factory

## BATTERY WINCH STACKER with FIXED PLATFORM

MODEL NO.	CAPACITY (LBS.)	LIFT HEIGHT (IN.)	MIN. PLAT. HEIGHT (IN.)	PLATFORM (IN.)	LOAD WHEEL	STEERING WHEEL	BATTERY	WEIGHT (LBS.)
BWS220P	220	67	5.2	18.5 x 23.6	3" DIA	5" DIA.	24V, 7.2Ah	127
BWS330P	330	59	5.2	18.5 x 23.6	3" DIA	5" DIA.	24V, 7.2Ah	121

# ERGO WORK POSITIONERS

1,000/2,000/3,000 LBS

## CAPACITY

- 1,000/2,000/3,000 lbs.

## LIFT HEIGHT

- 36" / 48" / 60"

## LOWERED HEIGHT

- 3 1/4" (see specs)

## SAFETY

- Velocity fuse on each cylinder
- Floor lock

## POWER SUPPLIES

D/C 12 volt battery  
with joy stick activation  
and a built in 12 volt charger  
(standard)

A/C 110 volt

Hand held pendant (optional)

## OPTIONS

- Different straddle leg sizes
- Different fork width lengths and heights
- D/C battery powered with hand held pendant
- Slip-on platforms




## STRADDLE ERGO WORK POSITIONER

MODEL NO.	CAPACITY (LBS.)	LIFT HEIGHT (IN.)	LOW'D FORK HEIGHT (IN.)	FORK WIDTH (IN.)	FORK LENGTH (IN.)	STRADDLE I.D. (IN.)	SHIPPING WEIGHT (LBS.)
SEWP36-10	1,000	36	3 1/4	26 1/2	42	50	600
SEWP36-20	2,000	36	3 1/4	26 1/2	42	50	650
SEWP36-30	3,000	36	3 1/4	26 1/2	42	50	675
SEWP48-10	1,000	48	3 1/4	26 1/2	42	50	625
SEWP48-20	2,000	48	3 1/4	26 1/2	42	50	675
SEWP48-30	3,000	48	3 1/4	26 1/2	42	50	700
SEWP60-10	1,000	60	3 1/4	26 1/2	42	50	650
SEWP60-20	2,000	60	3 1/4	26 1/2	42	50	675
SEWP60-30	3,000	60	3 1/4	26 1/2	42	50	725



## OPTIONS

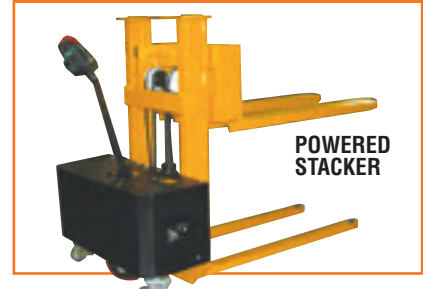

## ERGO WORK POSITIONER

MODEL NO.	CAPACITY (LBS.)	LIFT HEIGHT (IN.)	LOW'D FORK HEIGHT (IN.)	FORK WIDTH (IN.)	FORK LENGTH (IN.)	SHIPPING WEIGHT (LBS.)
EWP36-10	1,000	36	3 1/4	26 1/2	42	600
EWP36-20	2,000	36	3 1/4	26 1/2	42	650
EWP36-30	3,000	36	3 1/4	26 1/2	42	675
EWP48-10	1,000	48	3 1/4	26 1/2	42	625
EWP48-20	2,000	48	3 1/4	26 1/2	42	675
EWP48-30	3,000	48	3 1/4	26 1/2	42	700
EWP60-10	1,000	60	3 1/4	26 1/2	42	650
EWP60-20	2,000	60	3 1/4	26 1/2	42	675
EWP60-30	3,000	60	3 1/4	26 1/2	42	725



# DRIVE-ON LIFT TABLES

1,000/2,000/4,000 LBS



Self Lubricating  
Bronze Bushing in  
all Pivot Points



Torsion  
Stabilizing Bar

Sealed  
Bearings

Hold Down  
Tabs




## OPTIONS & SPECIAL APPLICATIONS



Safety Guard Rail


DRIVE THRU LOADING DOCK

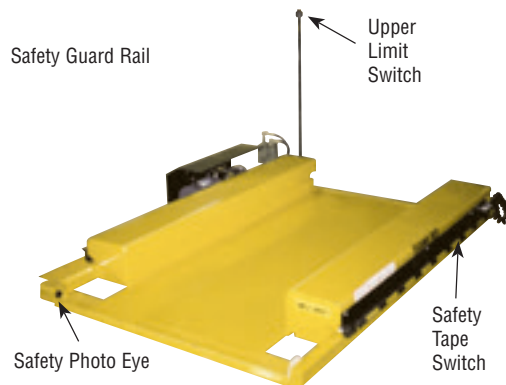

Upper  
Limit  
Switch

Safety Photo Eye

DRIVE THRU LIFT TABLE

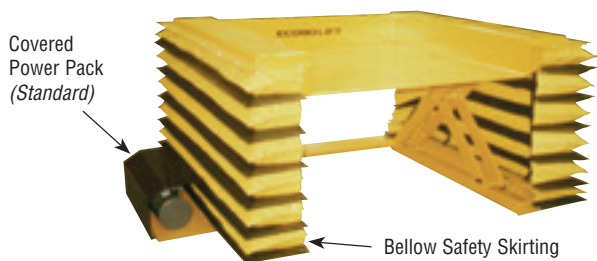

Covered  
Power Pack  
(Standard)

Bellow Safety Skirting



DRIVE THRU PORTABLE LIFT TABLE

### TRAVEL

- 30", 38"

### SAFETY

- Velocity fuse on each cylinder to eliminate tables from collapsing due to hose failure.
- Hold down tabs on all four corners.

### LOWERED HEIGHT OF TABLE

- Floor level

### POWER SUPPLIES

A/C 115 volt, 1H.P.  
(standard)

- Single phase motor  
(hand or foot operated  
controls standard)

A/C 220/460/575 volt,  
1H.P.

- Three phase motors  
(optional hand or foot  
operated controls  
available)

### Air/Hydraulic (standard)

- Foot operated  
(hand held pendant  
available)




### OPTIONS

- Different platform sizes
- Bellow safety skirting / safety touch bars
- Vertical travel - high or lower
- Limit switches / photo eyes
- Eye bolts - for moving lifts easily
- Drive through c/w flip down plate
- Semi-portable c/w dolly handle

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W <sub>1</sub> x L <sub>1</sub> (IN.)	LOW'D HEIGHT TP (IN.)	VERTICAL TRAVEL H <sub>2</sub> (IN.)	OVERALL SIZE W <sub>3</sub> L <sub>2</sub> (IN.)	PONTOON LOW'D HEIGHT H <sub>1</sub> (IN.)	OVERALL HEIGHT H <sub>3</sub> (IN.)
DO-SL 30-10	1,000	44 x 50	3/8	30	62.5 x 57	8	38
DO-SL 30-20	2,000	44 x 50	3/8	30	62.5 x 57	8	38
DO-SL 30-40	4,000	44 x 50	1/2	30	62.5 x 57	9	39
DO-SL 38-10	1,000	48 x 60	3/8	38	64 x 64	8	46
DO-SL 38-20	2,000	48 x 60	3/8	38	64 x 64	8	46
DO-SL 38-40	4,000	48 x 60	1/2	38	64 x 64	9	47

# DRIVE-ON LOADING DOCKS

1,000/2,000/4,000 LBS

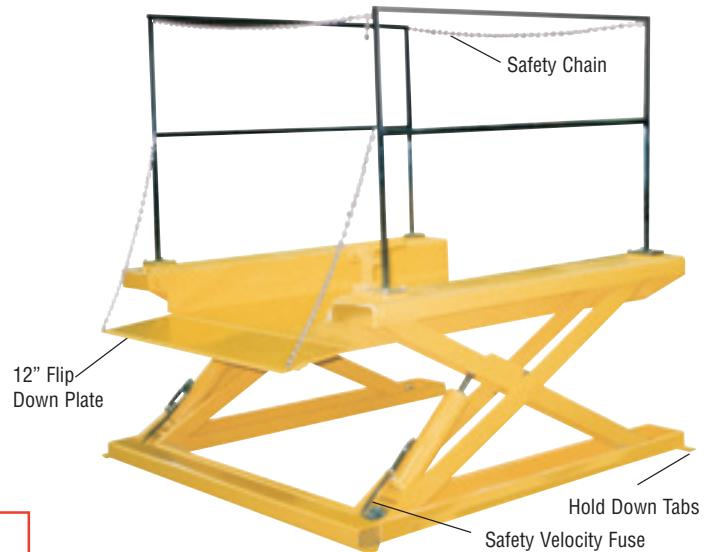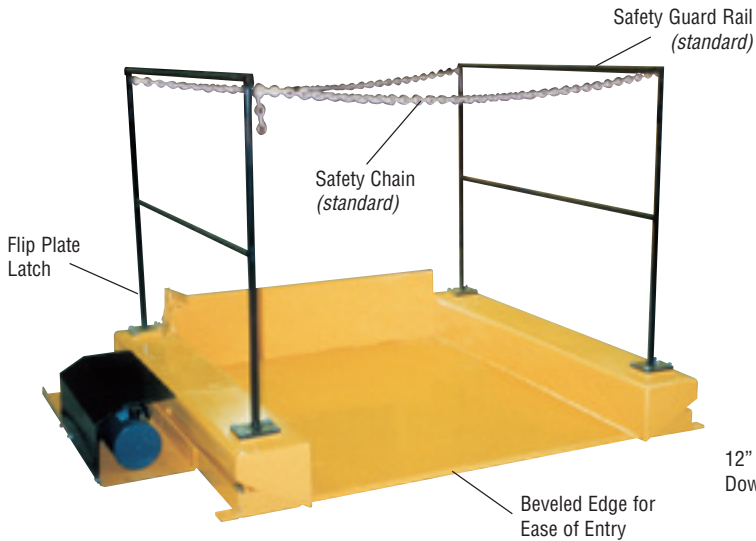

## TRAVEL

- 38", 60"

## SAFETY

- Velocity fuse on each cylinder to prevent tables from collapsing due to hose failure.
- Hold down tabs on all four corners.

## LOWERED

## HEIGHT OF TABLE

- Floor level

## POWER SUPPLIES

A/C 115 volt, 1H.P.

(standard)

- Single phase motor  
(hand or foot operated controls standard)

A/C 220/460/575 volt,

3 Phase 1H.P. - 5H.P.

(optional)

- Three phase motors  
(optional hand or foot operated controls available)

## Air/Hydraulic (standard)

- Foot operated  
(hand held pendant available)

## OPTIONS


- Different platform sizes
- Bellow safety skirting / safety touch bars
- Vertical travel-higher or lower
- Limit switches / photo eyes
- Eye bolts - for moving lifts easily
- Semi-portable c/w dolly handle

## OPTIONS & SPECIAL APPLICATIONS

DRIVE THRU LOADING DOCK APPLICATIONS  
(up & Down)  
(No Torsion Bar)



DOUBLE SCISSOR DRIVE-ON LOADING DOCK OR SCISSOR LIFT




Bellow Safety Skirting

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W x L (IN.)	FLIP PLATE W x L (FP)	PLATE THICKNESS LOW'D HEIGHT (PT)(IN.)	OVERALL LOWERED HEIGHT (IN.)	VERTICAL TRAVEL (TH)(IN.)	OVERALL SIZE (BWxBD)(IN.)	SHIPPING WEIGHT (LBS.)
DO-LD 38-10	1,000	50 x 60	50 x 18	3/8	2	38	68.8 x 68.5	1,000
DO-LD 38-20	2,000	50 x 60	50 x 18	3/8	2	38	68.8 x 68.5	1,200
DO-LD 38-40	4,000	50 x 60	50 x 18	1/2	2	38	68.8 x 68.5	1,400
DO-LD 60-10	1,000	72 x 96	72 x 18	3/8	2	60	92 x 103	1,600
DO-LD 60-20	2,000	72 x 96	72 x 18	1/2	2	60	92 x 103	1,800
DO-LD 60-40	4,000	72 x 96	72 x 18	1/2	2	60	92 x 103	2,000

# DRIVE-ON TILT TABLES

1,000/2,000/4,000 LBS

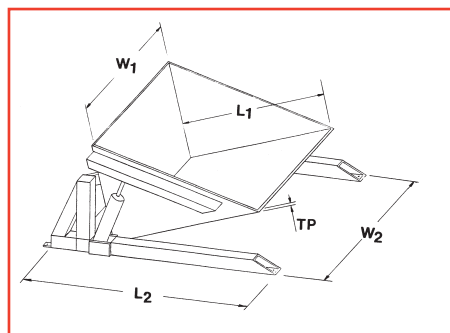

## TILT ANGLE

- 0-45°

## SAFETY

- Velocity fuse on each cylinder to eliminate tables from collapsing due to hose failure.
- Hold down tabs on all four corners.

## LOWERED HEIGHT OF TABLE

- Floor level

## POWER SUPPLIES

A/C 110 volt (standard)

Single phase motor  
(hand or foot operated controls available)

A/C 460/575 volt (optional)

Three phase motors


Air/Hydraulic (standard)

Foot operated


## OPTIONS

- Different platform sizes
- Bellow safety skirting
- Limit switches
- Photo Eye
- Semi-portable c/w dolly handle

## OPTIONS & SPECIAL APPLICATIONS

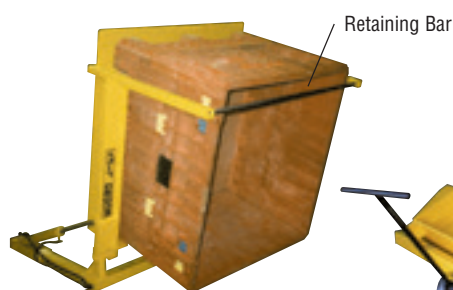

FLOOR LEVEL DUMPER

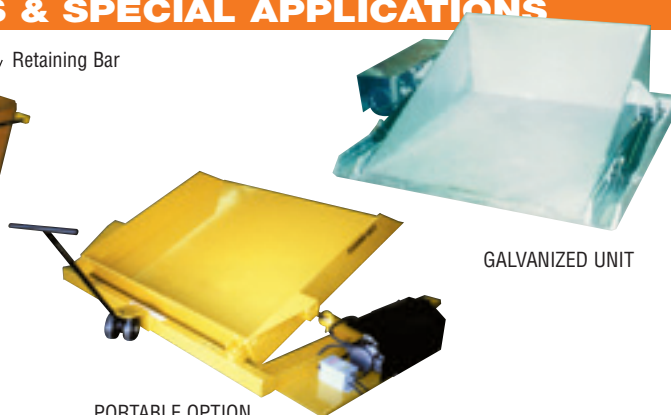




PORTABLE OPTION

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W <sub>1</sub> x L <sub>1</sub> (IN.)	LOW'D HEIGHT TP (IN.)	TILT ANGLE (degrees)	OVERALL SIZE W <sub>2</sub> x L <sub>2</sub> (IN.)
DO-TRT10-4450	1,000	44 x 50	3/8	45	55 x 54
DO-TRT20-4450	2,000	44 x 50	3/8	45	55 x 54
DO-TRT40-4450	4,000	44 x 50	1/2	45	55 x 54
DO-TRT10-5050	1,000	50 x 50	3/8	45	61 x 54
DO-TRT20-5050	2,000	50 x 50	3/8	45	61 x 54
DO-TRT40-5050	4,000	50 x 50	1/2	45	61 x 54



# DRIVE-ON LIFT/TILT TABLES

1,000/2,000/4,000 LBS

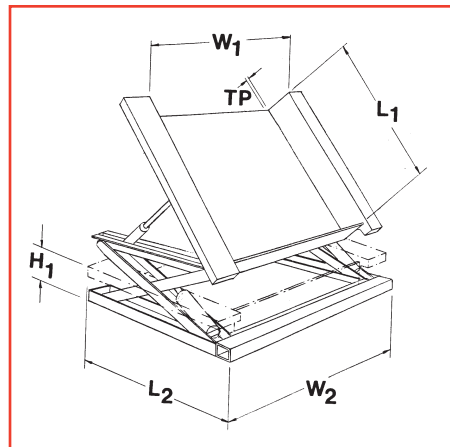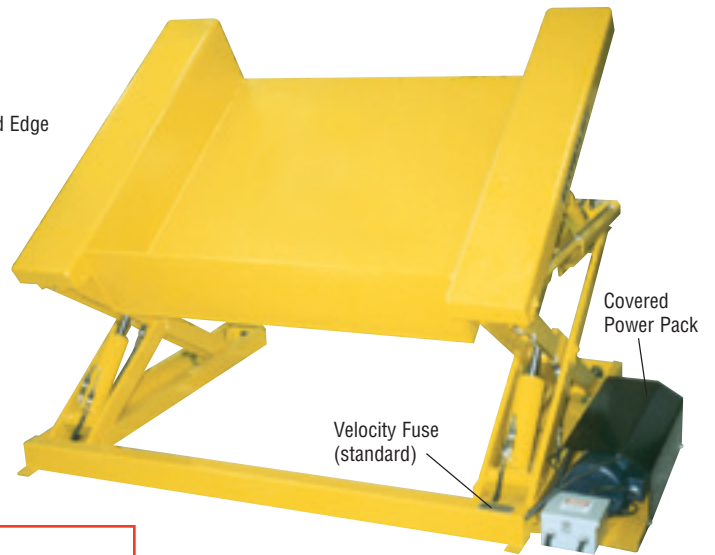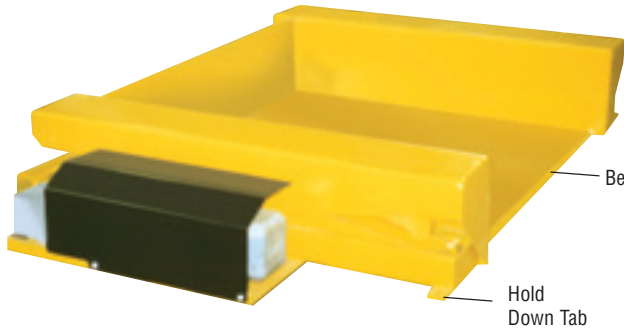

## TRAVEL

- 30", 38"

## TILT ANGLE

- 0-45°

## SAFETY

- Velocity fuse on each cylinder to eliminate tables from collapsing due to hose failure
- Hold down tabs on all four corners

## LOWERED HEIGHT OF TABLE

- Floor level

## POWER SUPPLIES

### A/C 110 volt

Single phase motor  
(hand or foot controls  
standard draws approx.  
15 amps)

### A/C 460/575 volt

Three phase motors  
(optional)



## Air/Hydraulic

Foot operated (Standard)  
(hand held pendant optional)

## OPTIONS

- Different platform sizes
- Bellow safety skirting / safety touch bars
- Vertical travel - high or lower
- Limit switches / photo eyes
- Eye bolts - for moving lifts easily
- Semi Portable - for moving empty lifts, c/w dolly handle

## OPTIONS & SPECIAL APPLICATIONS

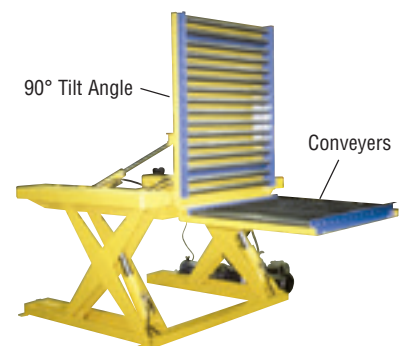



MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W <sub>1</sub> x L <sub>1</sub> (IN.)	LOW'D HEIGHT TP (IN.)	VERTICAL TRAVEL H <sub>2</sub> (IN.)	OVERALL SIZE W <sub>2</sub> x L <sub>2</sub> (IN.)	LOW'D HEIGHT H <sub>1</sub> (IN.)	OVERALL HEIGHT H <sub>3</sub> (IN.)
DO-SL/TRT 30-10	1,000	50 x 50	3/8	30	68.5 x 56	12	42
DO-SL/TRT 30-20	2,000	50 x 50	3/8	30	68.5 x 56	12	42
DO-SL/TRT 30-40	4,000	50 x 50	1/2	30	68.5 x 56	12	42
DO-SL/TRT 38-10	1,000	50 x 60	3/8	38	68.5 x 66	12	50
DO-SL/TRT 38-20	2,000	50 x 60	3/8	38	68.5 x 66	12	50
DO-SL/TRT 38-40	4,000	50 x 60	1/2	38	68.5 x 66	12	50

DRIVE-ONS


# DRIVE-ON HIGH POINT TILTERS

1,000/2,000/4,000 LBS

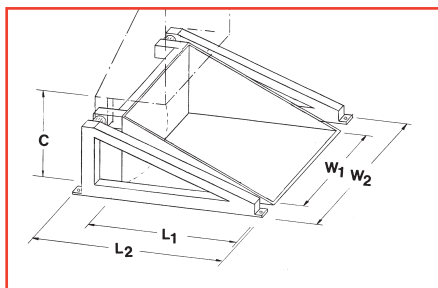


## OPTIONS & SPECIAL APPLICATIONS

Guides to help position load into unit

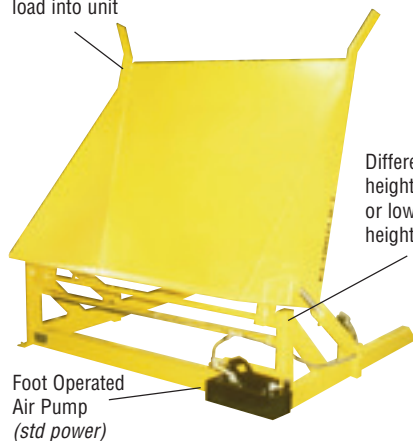

Different pivot heights for higher or lower working heights available

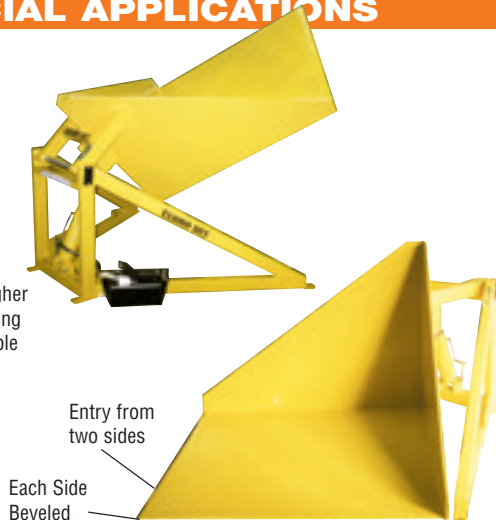

Entry from two sides

Each Side Beveled

GAYLORD CORNER TILTER

## TILT ANGLE

- 0-90 degrees

## SAFETY

- Velocity fuse on each cylinder to eliminate collapsing due to hose failure
- Maximum reach in tilted position to end of back plate - 30"

## POWER SUPPLIES

Air/Hydraulic (standard)

Foot Pedal Standard (hand control optional)

A/C 110/1/60 volt (standard)

Hand or foot control

A/C 460/575/3/60 volt (optional)

Hand or foot control

## OPTIONS


- Photo Eyes
- Safety Skirts
- Increase/restrict tilt angle
- Full plated platform
- Increase/reduce platform size
- Semi-portable c/w dolly handle

SPECIFICATIONS		DO-HPT10	DO-HPT20	DO-HPT40
Capacity	lbs.	1,000	2,000	4,000
Platform Size	in.	50" x 48"	50" x 48"	50" x 48"
W <sub>1</sub> x L <sub>1</sub>		or 60" x 50"	or 60" x 50"	or 60" x 50"
Platform Thickness - TP		3/8"	3/8"	1/2"
Tilt Angle		0-90°	0-90°	0-90°
Height from Floor at 90° - C		32"	32"	32"
Height of Back Plate		30"	30"	30"
Total Dimensions		57" x 59.5"	57" x 59.5"	57" x 59.5"
W <sub>2</sub> x L <sub>2</sub>		or 67" x 61.5"	or 67" x 61.5"	or 67" x 61.5"


# DRIVE-ON PLATFORM LIFTS

1,000/2,000/4,000 LBS

No Side Obstructions

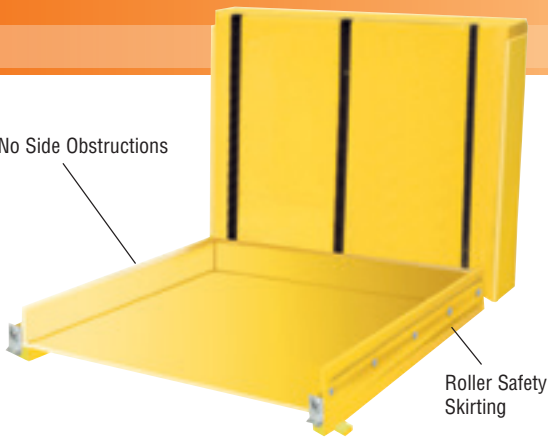


Roller Safety Skirting

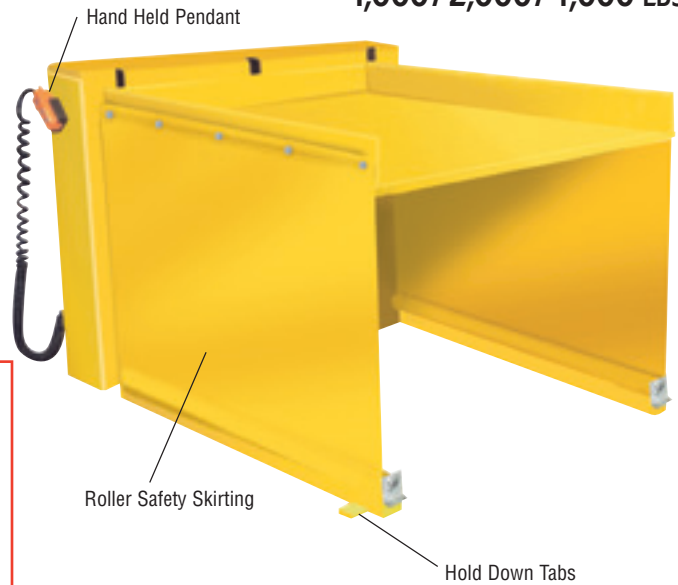

Hand Held Pendant

Roller Safety Skirting

Hold Down Tabs

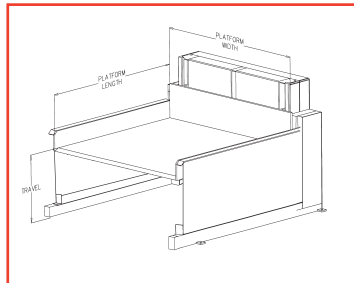

## VERTICAL TRAVEL

- 28"

## SAFETY

- Velocity fuse on each cylinder to eliminate collapsing due to hose failure
- Hold down tabs on all four corners
- Photo eye to interrupt lowering in the event of an obstruction (*optional*)

## LOWERED HEIGHT

- Floor level
- Beveled edge on platform

## POWER SUPPLIES

A/C 115/1/60 volt

Hand control (std)  
(foot optional)

A/C 460/575 volt

Three phase motors (*optional*)

Air/Hydraulic

Foot Control is available


## PORTABILITY

- Pins to lock platform 3 1/2" off ground so a pallet truck or fork lift can easily move unit to another area

## OPTIONS

- Platforms wider or longer
- Higher lift height
- Galvanized, stainless steel or "Steel-it" epoxy paint available
- Side Loading
- Tape Switches
- Turntable
- Retaining Bar
- Safety Photo Eye

## OPTIONS & SPECIAL APPLICATIONS

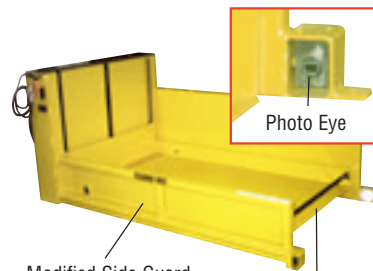

Modified Side Guard

Photo Eye


Retaining Bar



High Lift Side Loading




SCREW JACK PLATFORM LIFT

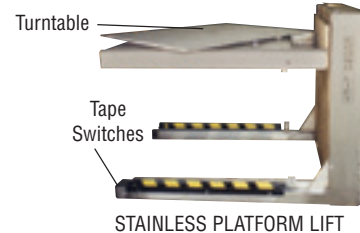

Turntable


Tape Switches

STAINLESS PLATFORM LIFT

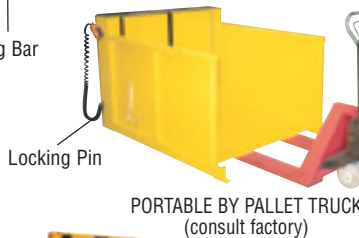

Locking Pin

PORTABLE BY PALLET TRUCK  
(consult factory)



Adjustable Forks



Fork Platform



BALL SCREW WEIGHT TRAINING SYSTEM



SIDE LOADING PLATFORM



DRIVE-ONS

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE (IN.)	LOW'D HEIGHT (IN.)	VERTICAL TRAVEL (IN.)	OVERALL SIZE (IN.)	REAR HEIGHT (IN.)
DO-PL44-10	1,000	44 x 50	3/8	28	51 x 62	46
DO-PL50-10	1,000	50 x 50	3/8	28	57 x 62	46
DO-PL44-20	2,000	44 x 50	1/2	28	51 x 62	46
DO-PL50-20	2,000	50 x 50	1/2	28	57 x 62	46
DO-PL44-40	4,000	44 x 50	1/2	28	51 x 62	46
DO-PL50-40	4,000	50 x 50	1/2	28	57 x 62	46



# STATIONARY DUMPERS

1,000/2,000/4,000/6,000 LBS

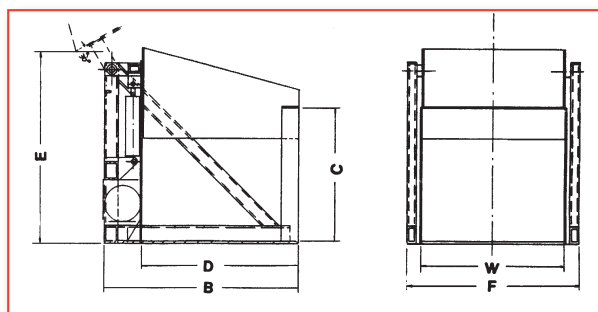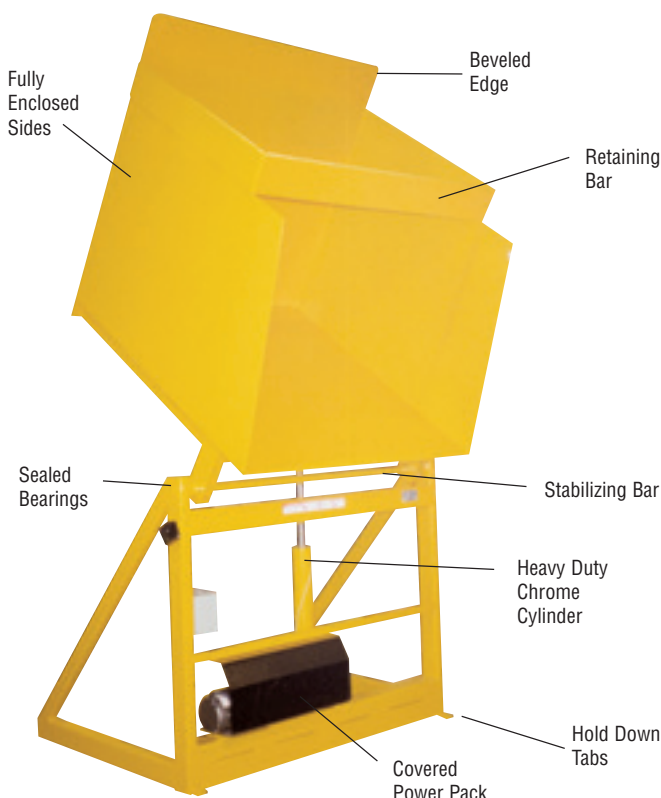

## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## BASE SIZES

- 48" wide x 36" long  
and 50" wide x 50" long

## DUMPING ANGLE

- 0° - 120°

## RETAINING BAR

- Fixed bar - mounted 3" above container height, located above opening
- Spring loaded bar available for multiple container heights (optional)

## SAFETY

- Velocity fuse is standard on each cylinder to eliminate dumpers from collapsing due to hose failure
- Hold down tabs in each corner
- Flow control and pressure equalizing valve built in each pump
- Fully enclosed sides to give the dumper stability, avoid spillage and funnel product

## POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand held (standard)

Foot control (optional)

A/C 220-460-575/3/60 volt

Hand or foot controlled (optional)

Air/Hydraulic

Foot control (standard)

Hand control (optional)

## OPTIONS

- Larger/smaller platform sizes
- Increase/reduce pump height
- Portability
- Limit switchcases
- Special electrical controls
- Chute attachments
- Galvanized, stainless steel, "Steel It" epoxy paint
- Stands for higher dumping applications
- Side guards

## STATIONARY DUMPER

MODEL NO.	CAPACITY (LBS.)	PLAT. SIZES (W x D) (IN.)	DUMP HEIGHT (E) (IN.)	TILT ANGLE	R'TEG BAR (C) (IN.)	OVERALL DIM. (F x B) (IN.)
<b>DUMP HEIGHT 36"</b>						
SD 36-10	1,000	48 x 36	36	0 - 120°	UP TO 40	54 x 52
		50 x 50	36	0 - 120°	UP TO 40	56 x 66
SD 36-20	2,000	48 x 36	36	0 - 120°	UP TO 40	54 x 52
		50 x 50	36	0 - 120°	UP TO 40	56 x 66
SD 36-40	4,000	48 x 36	36	0 - 120°	UP TO 40	54 x 52
		50 x 50	36	0 - 120°	UP TO 40	56 x 66
SD 36-60	6,000	48 x 36	36	0 - 120°	UP TO 40	54 x 52
		50 x 50	36	0 - 120°	UP TO 40	56 x 66
<b>DUMP HEIGHT 48"</b>						
SD 48-10	1,000	48 x 36	48	0 - 120°	UP TO 48	54 x 52
		50 x 50	48	0 - 120°	UP TO 48	56 x 66
SD 48-20	2,000	48 x 36	48	0 - 120°	UP TO 48	54 x 52
		50 x 50	48	0 - 120°	UP TO 48	56 x 66
SD 48-40	4,000	48 x 36	48	0 - 120°	UP TO 48	54 x 52
		50 x 50	48	0 - 120°	UP TO 48	56 x 66
SD 48-60	6,000	48 x 36	48	0 - 120°	UP TO 48	54 x 52
		50 x 50	48	0 - 120°	UP TO 48	56 x 66
<b>DUMP HEIGHT 60"</b>						
SD 60-10	1,000	48 x 36	60	0 - 120°	UP TO 60	54 x 52
		50 x 50	60	0 - 120°	UP TO 60	56 x 66
SD 60-20	2,000	48 x 36	60	0 - 120°	UP TO 60	54 x 52
		50 x 50	60	0 - 120°	UP TO 60	56 x 66
SD 60-40	4,000	48 x 36	60	0 - 120°	UP TO 60	54 x 52
		50 x 50	60	0 - 120°	UP TO 60	56 x 66
SD 60-60	6,000	48 x 36	60	0 - 120°	UP TO 60	54 x 52
		50 x 50	60	0 - 120°	UP TO 60	56 x 66

See page 29 for options available.

# STATIONARY DUMPERS

1,000/2,000/4,000/6,000 LBS

## OPTIONS & SPECIAL APPLICATIONS



PORTABLE DUMPER W/  
ADJUSTABLE  
RETAINING BAR



PORTABLE DUMPER W/  
NARROW  
DISCHARGE CHUTE



SIDE LOADING DUMPER



DUMPER ON A STAND  
WITH LOCK OUT CAGE



STATIONARY DUMPER  
W/ADJUSTABLE  
RETAINING BAR



STATIONARY DUMPER  
W/STAINLESS DISCHARGE CHUTE  
& SPECIAL RETAINING SCREEN



STATIONARY DUMPER WITH  
ADJUSTABLE CHUTE ATTACHMENT  
AND SAFETY SKIRTING



PORTABLE FORK  
OVERARM DUMPER



FULLY AUTOMATED DUMPER  
WITH MANUAL OVER RIDE  
AND "E" STOP



STATIONARY FORK OVERARM  
DUMPER FOR DUMPING  
PORTABLE CONTAINERS



SAFETY GATE  
WITH LOCK OUT



WHEELED CART DUMPER



"STEEL-IT" PAINTED FOOD  
GRADE DUMPER



STAINLESS STEEL DOUGH  
TROUGH DUMPER



STAINLESS STEEL  
DUMPER



Stainless Glass Bead Finish




PORTABLE STAINLESS STEEL  
"V" MAG DUMPER



GALVANIZED DUMPER  
WITH STAINLESS CHUTE




STATIONARY DUMPER  
WITH HYDRAULIC GATES

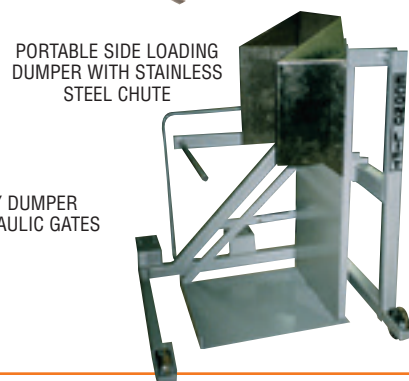

PORTABLE SIDE LOADING  
DUMPER WITH STAINLESS  
STEEL CHUTE




STATIONARY  
CONVEYOR  
DUMPER




PORTABLE CONVEYOR  
DUMPER WITH CHUTE

# PORTABLE DRUM DUMPERS

750 / 1,000 / 2,000 LBS

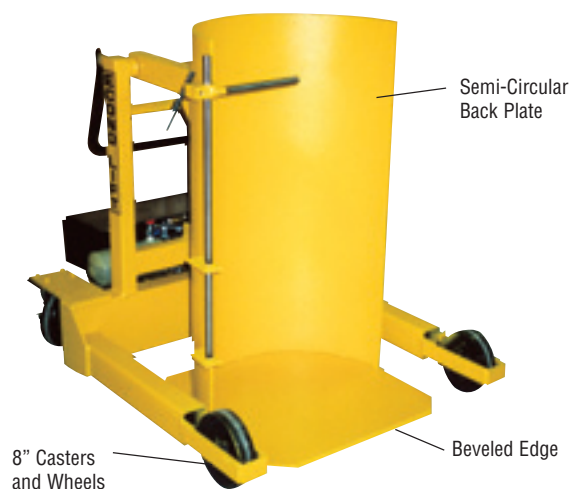

## OPTIONS & SPECIAL APPLICATIONS

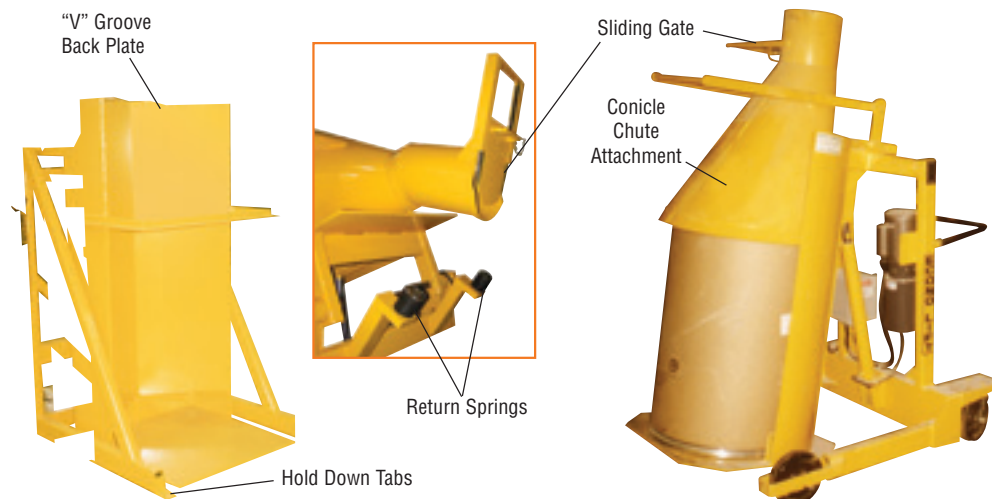

### CAPACITY

- 750/ 1,000/ 2,000 lbs.

### DUMP HEIGHTS

- 36", 48", 60"

### BACKPLATE DIAMETER

- 24"

### PLATFORM SIZE

- 24" x 24"

### CASTERS/ WHEELS

- 8" dia. x 2" wide

### RETAINING BAR

- Fixed
- Adjustable

### SAFETY

- Velocity fuse (in case of hose failure it will stop unit from coming down)
- Down flow control - built into power pack, (pressure compensated)
- Heavy duty floor lock

### POWER OPTIONS

A/C 110 volt /1/60

Hand held pendant (standard)

A/C 230/460/575/3/60 power

Optional

Air/Hydraulic

Foot control (standard)

Hand held pendant (optional)

### OPTIONS



- Increase/decrease: platform, diameter of backplate, dump height, tilt angle
- Chute attachments
- Fixed retaining bars
- Stainless Steel
- Galvanized
- "Steel-it" epoxy finish paint
- Limit switches
- "V" groove back plate

MODEL NO.	CAPACITY (LBS.)	DUMP HEIGHT (IN.)	CHUTE REACH (IN.)	BACKPLATE DIAMETER (IN.)	DUMP ANGLE (DEGREES)	EXTENDED OVERHEAD HEIGHT (IN.)	OVERALL DIMENSIONS (W x L)(IN.)	SHIPPING WEIGHT (LBS)
PDD36-7.5	750	36	25	24	0-120	90	34 x 51	625
PDD36-10	1,000	36	25	24	0-120	90	34 x 51	675
PDD36-20	2,000	36	25	24	0-120	90	34 x 51	800
PDD48-7.5	750	48	15	24	0-120	98	34 x 51	650
PDD48-10	1,000	48	15	24	0-120	98	34 x 51	700
PDD48-20	2,000	48	15	24	0-120	98	34 x 51	850
PDD60-7.5	750	60	15	24	0-120	118	34 x 51	690
PDD60-10	1,000	60	15	24	0-120	118	34 x 51	750
PDD60-20	2,000	60	15	24	0-120	118	34 x 51	900



# STATIONARY UPENDERS

1,000/2,000/4,000/6,000 LBS

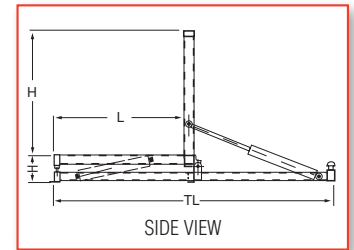

## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## LOW HEIGHT

- 10"

## TILT ANGLE

- 0-90 degrees

## SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing
- Hold down tabs on all four corners

## CYLINDERS

- Double acting


## POWER

- A/C 110 volt, single phase (standard) amp draw 15(+) amps
- Hand or foot control

## OPTIONAL

- A/C 220/460/575, three phase available
- Hand or foot control (standard)
- Larger/smaller platforms
- "V" backplates for rolls/coils
- Conveyors
- Safety skirting

## OPTIONS & SPECIAL APPLICATIONS

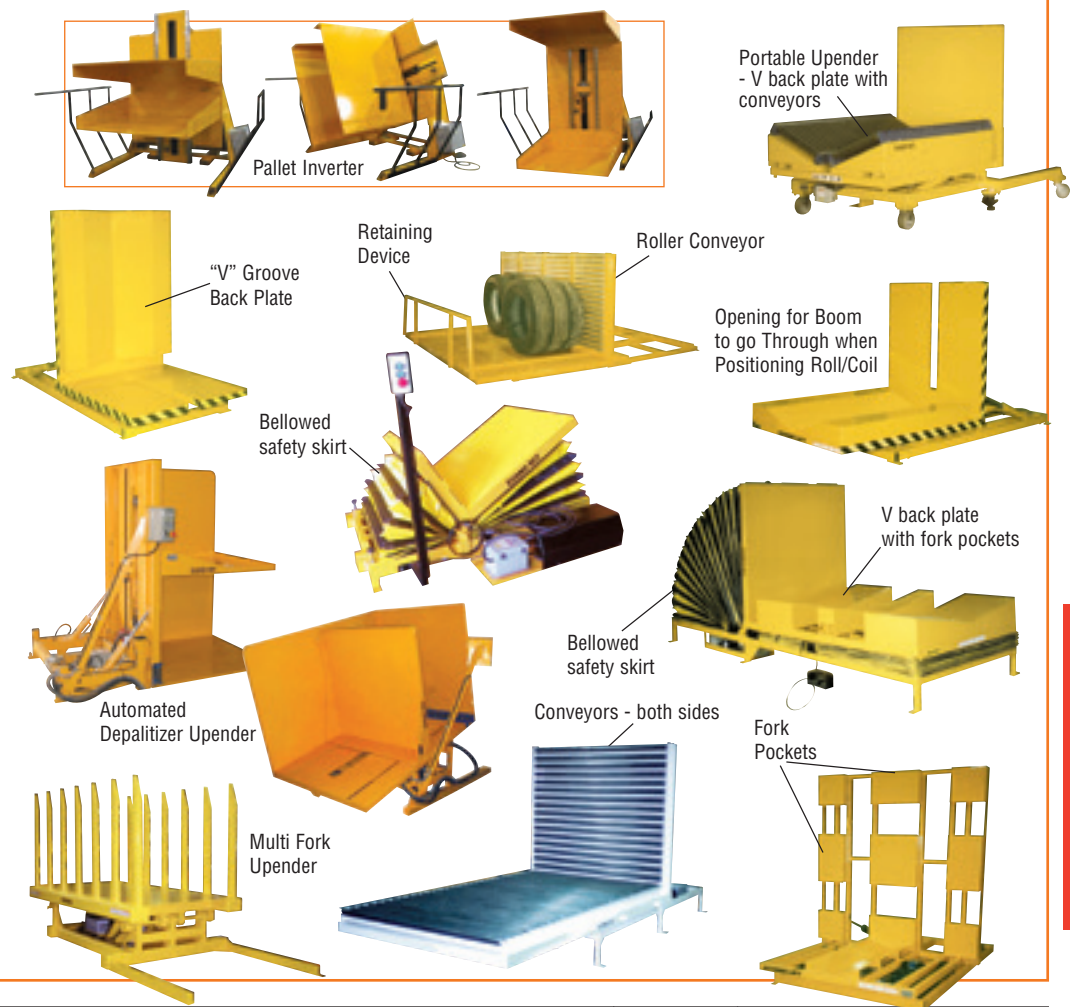


MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE width x length x height (IN.)	LOW'D HEIGHT TP (IN.)	TOTAL LENGTH (IN.)	TILT ANGLE
SU36-10	1,000	36 x 36 x 36	10	76	0 - 90°
SU36-20	2,000	36 x 36 x 36	10	76	0 - 90°
SU36-40	4,000	36 x 36 x 36	10	76	0 - 90°
SU36-60	6,000	36 x 36 x 36	10	76	0 - 90°
SU52-10	1,000	52 x 52 x 52	10	108	0 - 90°
SU52-20	2,000	52 x 52 x 52	10	108	0 - 90°
SU52-40	4,000	52 x 52 x 52	10	108	0 - 90°
SU52-60	6,000	52 x 52 x 52	10	108	0 - 90°

# MANUAL TURNTABLES


1,000/2,000/4,000/6,000 LBS




## OPTIONS & SPECIAL APPLICATIONS



Conveyor mounted on Turntable

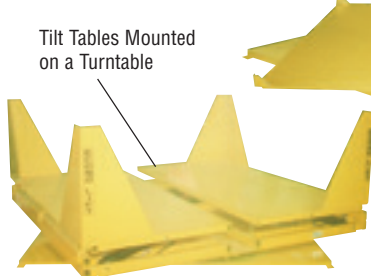

Tilt Tables Mounted on a Turntable

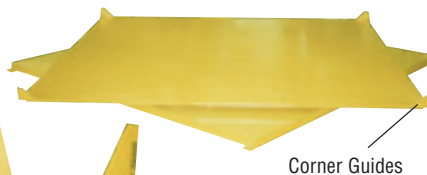

Corner Guides

### CAPACITY

- 1,000 / 2,000 / 4,000 / 6,000 lbs.

### BEARINGS

- 2" diameter
- Sealed ball bearing type

### ROTATION

- 360°

### LOW HEIGHT

- 5"


### OPTIONS

- Spring loaded detents
- Manual detents
- Larger / smaller platforms

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W <sub>1</sub> x L <sub>1</sub> (IN.)	OVERSIZED PLATFORM UP TO (IN.)	LOWERED HEIGHT (IN.)	WEIGHT (LBS.)
TT 24-10	1,000	24 x 24	40 x 40	5	190
TT 24-20	2,000	24 x 24	40 x 40	5	210
TT 24-40	4,000	24 x 24	40 x 40	5	240
TT 24-60	6,000	24 x 24	40 x 40	5	255
TT 48-10	1,000	48 x 48	60 x 60	5	350
TT 48-20	2,000	48 x 48	60 x 60	5	375
TT 48-40	4,000	48 x 48	60 x 60	5	450
TT 48-60	6,000	48 x 48	60 x 60	5	475

# POWER TURNTABLES

2,000/4,000/6,000 LBS

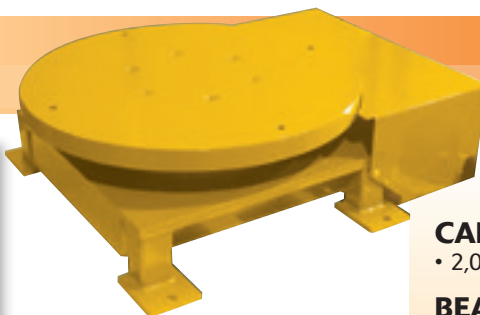

### CAPACITY

- 2,000 / 4,000 / 6,000 lbs.

### BEARINGS

- Tapered roller bearing

### ROTATION

- 360°

### POWERED OPTIONS

- AC 110/1/60 or 460/575/3/60 (connector plug not included)

### STANDARD

- Smooth steel rectangular or circular tops
- All models have center slew ring with support bearings
- NEMA 12 wired controls - forward/reverse. Push button control with 8' cable
- 1/2 to 3/4HP geared brake motor on powered models

\* CUSTOM SIZES, CAPACITIES AND OPTIONS ARE AVAILABLE

## OPTIONS & SPECIAL APPLICATIONS



TURNTABLE with Wire Mesh Guides


WORK CELL TURNTABLE with Wire Mesh Guides



MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W <sub>1</sub> x L <sub>1</sub> (IN.)	OVERSIZED PLATFORM UP TO (IN.)	LOWERED HEIGHT (IN.)	WEIGHT (LBS.)
PTT36-20	2,000	36" DIA. OR SQUARE	48" DIA. OR SQUARE	12	350
PTT36-40	4,000	36" DIA. OR SQUARE	48" DIA. OR SQUARE	12	400
PTT36-60	6,000	36" DIA. OR SQUARE	48" DIA. OR SQUARE	12	450

# TILT TABLES

1,000/2,000/4,000/6,000 LBS

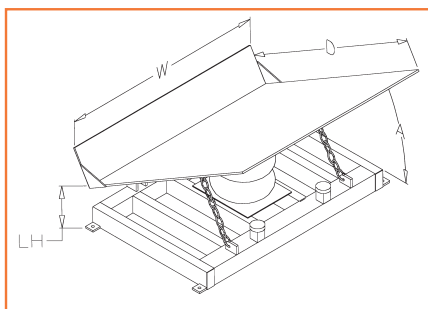

## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## TILT ANGLE

- 0-40 degrees (standard)

## FRONT RETAINING LIP

- 8" high (standard)

## SAFETY

- Restraining chain
- Maintenance Bar

## LOWERED HEIGHT

- 9"

## POWER SUPPLY

### Air

- Pedestal Mounted Hand Control (up/down valve)
- Covered Foot Control (optional)




## SAFETY

- Bellow safety skirting
- Retaining lip - larger or smaller
- Conveyor or ball transfer tops

## OPTIONS

- Platforms: larger or smaller
- Tilt Angle: restricted
- Mounted on carousel
- Ross air valves

## OPTIONS & SPECIAL APPLICATIONS

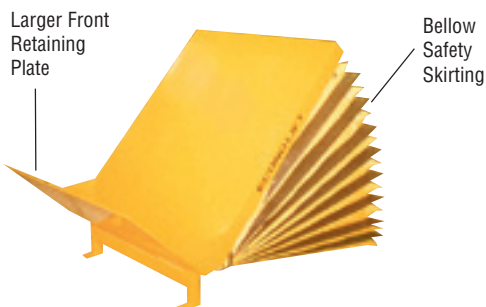



OVERSIZE PLATFORM

MODEL NO.	CAPACITY (lbs.)	PLATFORM SIZE wide x deep (W x D) (IN.)	MAXIMUM PLATFORM SIZE wide x deep (W x D) (IN.)	LOW HEIGHT (LH) (IN.)	TILT ANGLE (A)	WEIGHT (lbs.)
<b>36" WIDE AIR BAG TILT TABLES</b>						
ABTRT-1-3636	1,000	36 x 36	48 x 48	9	30°	250
ABTRT-2-3636	2,000	36 x 36	48 x 48	9	30°	380
ABTRT-4-3636	4,000	36 x 36	48 x 48	9	30°	410
ABTRT-6-3636	6,000	36 x 36	48 x 48	9	30°	430
<b>50" WIDE AIR BAGS TILT TABLES</b>						
ABTRT-1-5050	1,000	50 x 50	72 x 72	9	30°	320
ABTRT-2-5050	2,000	50 x 50	72 x 72	9	30°	450
ABTRT-4-5050	4,000	50 x 50	72 x 72	9	30°	490
ABTRT-6-5050	6,000	50 x 50	72 x 72	9	30°	580



# LIFT TABLES

1,000/2,000/4,000/6,000 LBS

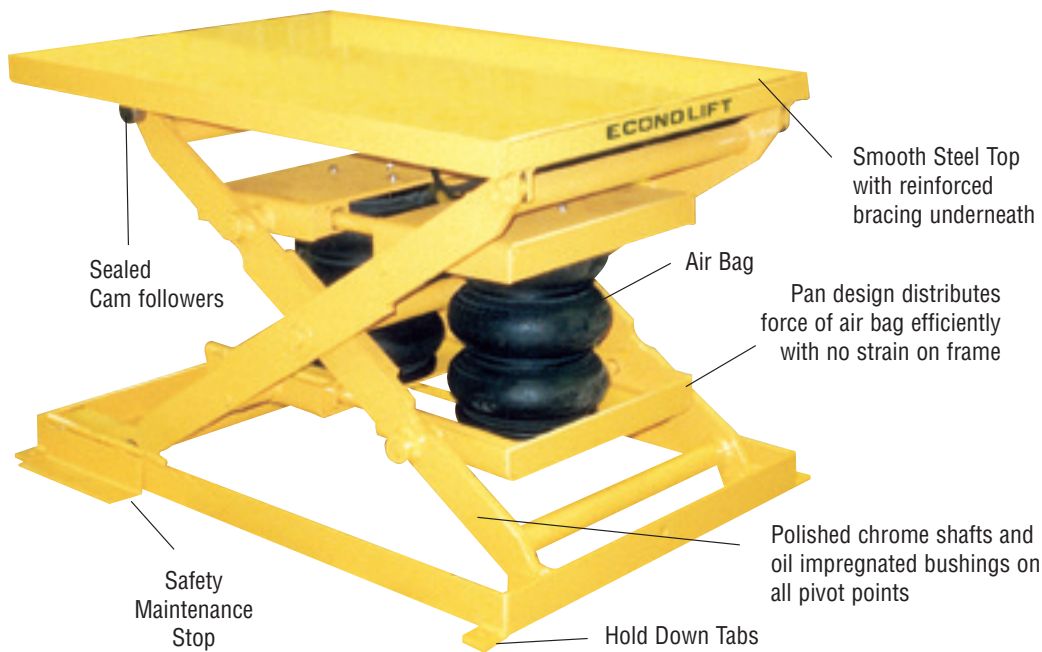

## CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

## PLATFORM SIZES

- 32" wide x 48" long to 72" wide x 72" long

## BASE SIZES

- Standard 32" and 48" wide x 48" long

## TRAVEL

- 24" vertical travel

## LOWERED HEIGHT

- 9"

## SAFETY

- Flip over maintenance stop
- Captured rollers


## POWER SUPPLY

### Air Bag

- Pedestal Mounted Hand Control (up/down valve)
- Covered Foot Control (optional)



## OPTIONS & SPECIAL APPLICATIONS

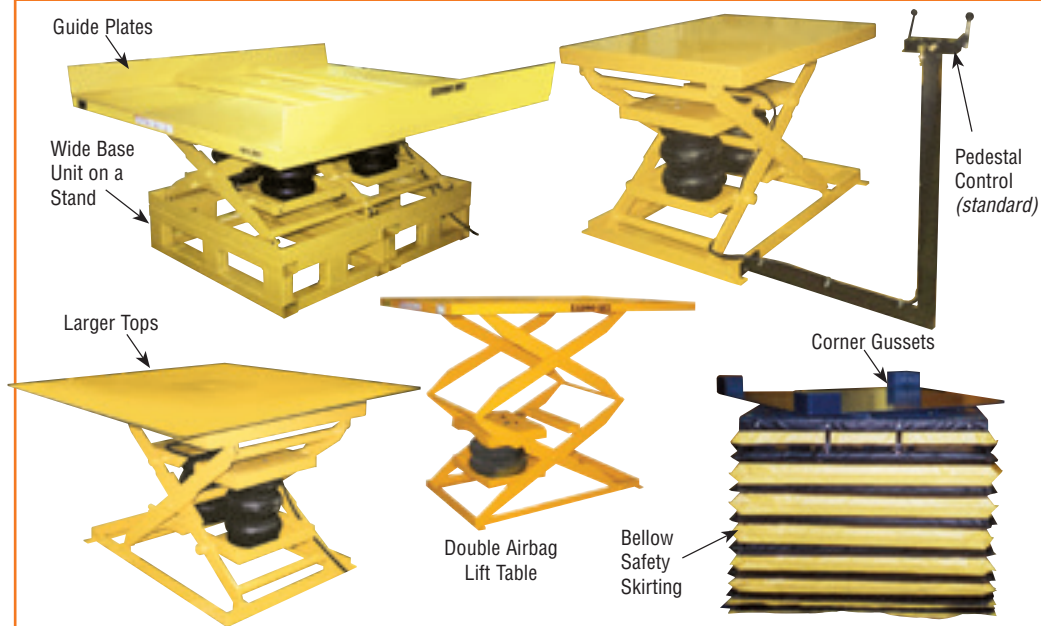

## MAINTENANCE

- Hinged table top provides easy access to air bag
- Self lubricated bronze bushings on all wear points


## OPTIONS

- Oversized platforms
- Corner gussets
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Semi-portable
- Portable
- Motion stabilizer
- Fork pockets
- Safety lock-out valves
- Ross air valves


MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE wide x length (W X L) (IN.)	OVERSIZED PLATFORM (UP TO) (IN.)	LOW HEIGHT (LH) (IN.)	TRAVEL (IN.)	RAISED HT (RH) (IN.)	# AIR BAGS	SHIPPING WT (LBS)
<b>BASE SIZE: 32" WIDE x 48" LONG</b>								
ABSL 10-3248	1,000	32 x 48	56 x 72	9	24	33	1	650
ABSL 20-3248	2,000	32 x 48	56 x 72	9	24	33	1	685
ABSL 40-3248	4,000	32 x 48	56 x 72	9	24	33	2	725
<b>BASE SIZE: 48" WIDE x 48" LONG</b>								
ABSL 10-4848	1,000	48 x 48	72 x 72	9	24	33	1	720
ABSL 20-4848	2,000	48 x 48	72 x 72	9	24	33	1	745
ABSL 40-4848	4,000	48 x 48	72 x 72	9	24	33	2	870
ABSL 60-4848	6,000	48 x 48	72 x 72	9	24	33	4	925

# LIFT/TILT TABLES

1,000/2,000/4,000/6,000 LBS



## OPTIONS

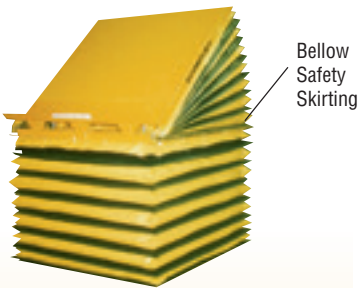

Bellow Safety Skirting

### CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

### TILT ANGLE

- 0-40 degrees (standard)

### LOWERED HEIGHT

- 15"

### TRAVEL

- 24"

### FRONT RETAINING LIP

- 8" high (standard)

### POWER SUPPLY


#### Air

- Pedestal Mounted Hand Control (up/down valve)
- Covered Foot Control (optional)



### OPTIONS


- Platforms: wider or deeper
- Bellow safety skirting
- Stainless steel, galvanized or 'steel-it' painted units
- Lift/tilt: reduced
- Ross valves

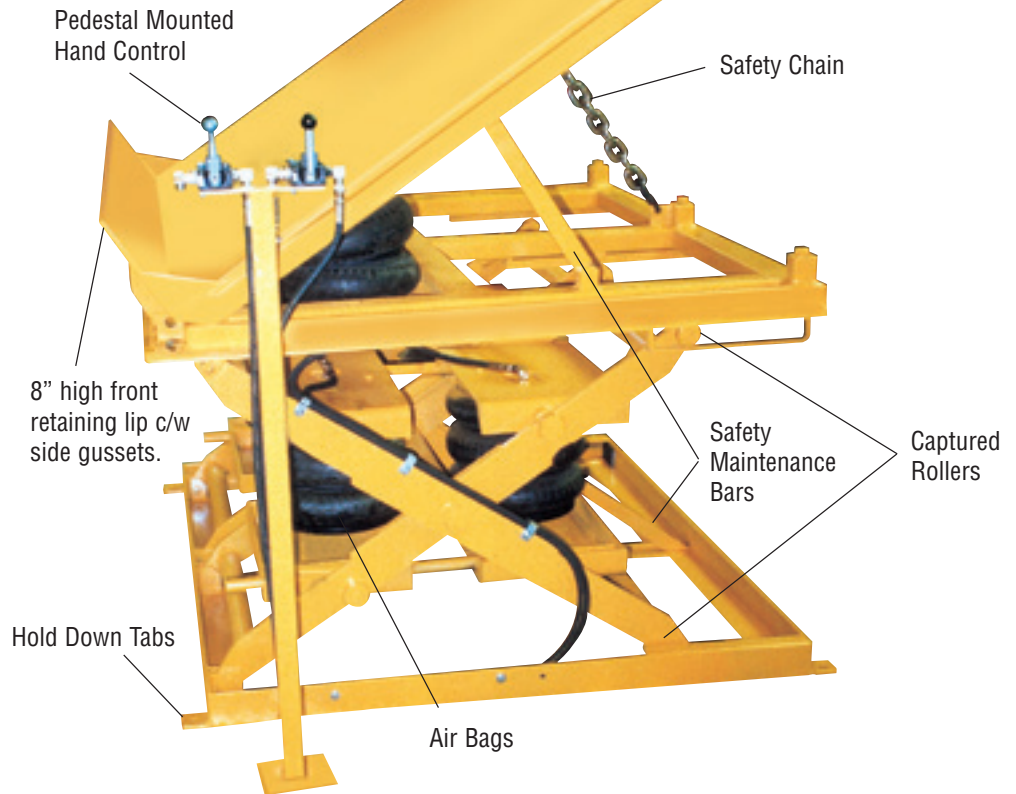

MODEL NO.	CAPACITY (LBS)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (LH) (IN.)	TRAVEL (IN.)	RAISED HEIGHT (TH) (IN.)	TILT ANGLE (A) Degrees	APPROX. WT (LBS)
<b>BASE SIZE: 36" WIDE X 48" DEEP</b>								
ABTR-SL10-3660	1,000	36 x 48	60 x 72	15	24	39	30	1000
ABTR-SL20-3660	2,000	36 x 48	60 x 72	15	24	39	30	1150
ABTR-SL40-3660	4,000	36 x 48	60 x 72	15	24	39	30	1295
ABTR-SL60-3660	6,000	36 x 48	60 x 72	15	24	39	30	1395
<b>BASE SIZE: 48" WIDE X 48" DEEP</b>								
ABTR-SL10-4848	1,000	48 x 48	72 x 72	15	24	39	30	1195
ABTR-SL20-4848	2,000	48 x 48	72 x 72	15	24	39	30	1295
ABTR-SL40-4848	4,000	48 x 48	72 x 72	15	24	39	30	1395
ABTR-SL60-4848	6,000	48 x 48	72 x 72	15	24	39	30	1495
<b>BASE SIZE: 60" WIDE X 48" DEEP</b>								
ABTR-SL10-6048	1,000	60 x 48	84 x 72	15	24	39	30	1295
ABTR-SL20-6048	2,000	60 x 48	84 x 72	15	24	39	30	1395
ABTR-SL40-6048	4,000	60 x 48	84 x 72	15	24	39	30	1495
ABTR-SL60-6048	6,000	60 x 48	84 x 72	15	24	39	30	1595

# ERGO SELF LEVELLER

450 - 4,500 LBS

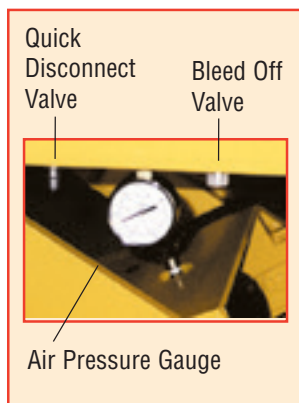

Pressure Gauge  
Quick Disconnect and  
manual bleed off valve



**Total Height Available**  
Weight on Unit vs P.S.I. (in inches)

WEIGHT (LBS)	TOTAL HEIGHT		
	at 100 P.S.I.	at 80 P.S.I.	at 60 P.S.I.
0	33	33	33
250	30	28.5	27
500	28.25	26.75	25
1000	27	26	23.5
1500	26	25	22.75
2000	24.25	23.25	20.75
3000	19.25	17.75	15.25
4000	13.5	12.5	10.25
4500	10.5	9	9

NOTE: All total heights have a tolerance between +/- .25".

## CAPACITY

- 450-4,500 lbs.

## PLATFORM SIZES

- 32" wide x 48" long  
to 56" wide x 72" long

## BASE SIZE

- 32" wide x 48" wide

## TRAVEL

- 24"

## LOWERED HEIGHT

- 9"

## SAFETY

- Restraining Chain
- Maintenance Bar

## POWER SUPPLY


Air

## MAINTENANCE


- Hinged table top provides easy access to air bag
- Self lubricated bronze bushings on all wear points

## OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
  - spring detents
  - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Semi-portable
- Portable

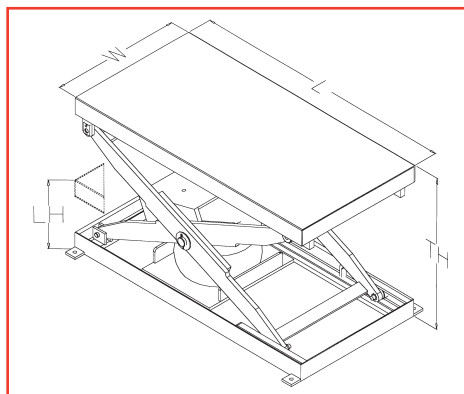

## OPTIONS & SPECIAL APPLICATIONS

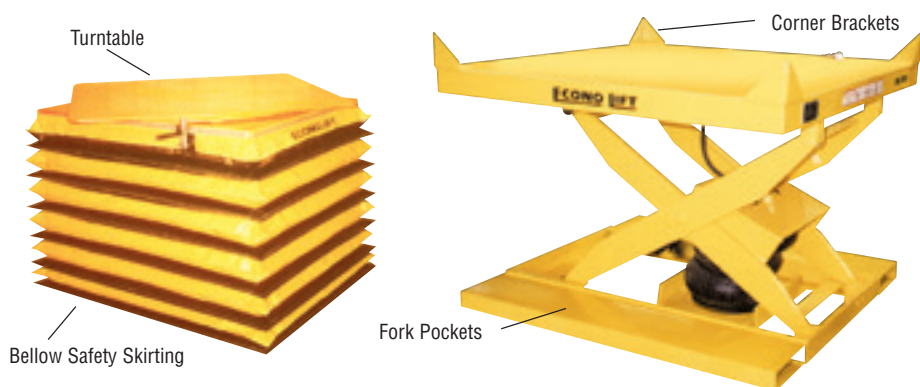

MODEL NO.	CAPACITY (LBS.)	PLATFORM/BASE SIZE (W X L) (IN.)	LOW -HEIGHT (LH) (IN.)	TRAVEL (IN.)	TOTAL HT (TH) (IN.)	WEIGHT (LBS)
ESL45	450-4,500	32 x 48	9	24	33	600



# STANDARD TERMS & CONDITIONS

**AGREEMENT:** These terms and conditions and any schedules attached hereto shall constitute the entire Agreement between Econo Lift Ltd. (hereinafter referred to as "Econo") and Buyer for all Equipment and services to be provided to Buyer noted on the reverse, and supersedes all prior agreements, understandings, negotiations and discussions, whether written or oral. There are no conditions, covenants, agreements, representations, warranties or other provisions, express or implied, collateral, statutory or otherwise, relating to the subject matter hereof except as provided in this agreement.

**DELIVERY:** Delivery dates are estimates and not guarantees and are based on conditions at the time of this Agreement. Econo will use its best effort in the ordinary course of its business to affect deliveries as specified, but in no event shall Econo be liable for any damage, consequential or otherwise, arising from any failure of Econo to meet any delivery date. Buyer shall not be entitled to terminate this agreement in the event of a late delivery of the drawings or Equipment.

**RISK OF LOSS:** Risk of loss with respect to the Equipment furnished under this Agreement shall pass to the Buyer at the time of delivery of the products to the carrier for shipment. F.O.B. points shall be the Econo factory otherwise specified.

**PAYMENT:** Prior to commencing the manufacture of the Equipment, Econo shall invoice Buyer for the purchase price of the Equipment pursuant to this Agreement (which invoice may also reflect charges for freight, handling, taxes and other amounts payable to Econo hereunder). All amounts specified in any such invoice shall be paid by Buyer to Econo at the times and in accordance with this Agreement. Buyer shall provide the deposit(s) noted on the reverse on the dates noted therein. All deposits are non-refundable. Any amount due hereunder from Buyer and not paid by the due date hereon shall bear interest at the rate of two percent (2%) per month (24% per annum). Such interest shall be in addition to and without limitation of any other right or remedies which Econo may have under this Agreement or at law or in equity. Buyer agrees to pay any legal fees and costs incurred by Econo in the collection of any delinquent amounts due to under this Agreement. Buyer shall be responsible for all taxes arising out of or related to the provisions of products and services under this Agreement, including but not limited to sales excise taxes. Such taxes shall be in addition to the purchase price unless otherwise specified. Should any government or governmental body, board or agency impose or increase any applicable sales, excise or other taxes beyond those in effect at the date of this contract, Econo reserves the right to increase prices to the Buyer by an amount sufficient to cover such additional taxes. Econo will review the Buyer's credit worthiness prior to Econo's acceptance of this agreement.

**MANUFACTURE, DRAWINGS AND SPECIFICATIONS:** The Equipment shall be constructed and manufactured in a good and workmanlike manner in accordance with drawings that have been prepared by Econo in reliance on specifications supplied by Buyer (the "Drawings"), within a reasonable time after acceptance and execution of this agreement by Buyer. Manufacture of Equipment by Econo shall only commence after Drawings have been jointly approved by Econo and the Buyer. Manufacturing services performed hereunder by Econo shall not be interpreted as approval of design of function by the Buyer. Econo assumes no liability whatsoever with regard to the Buyer's compliance or fulfillment of its obligations with respect to any statute, regulation or by-law prevailing at any of the surveyed locations, or the Buyer's failure to so comply with or fulfill its obligations. Manufacture of Equipment shall be made in accord with the specifications and materials noted herein and on the Drawings. No agreement or other understanding in any way changing or adding to any matters specified on the approved Drawings herein shall be binding on Econo or confer any rights on the Buyer unless attached hereto and by reference herein made a part of this agreement or made in writing signed by an authorized representative of Econo. Any cost incurred by Econo in making alterations necessitated by the furnishing by the Buyer of incorrect data and specifications will be charged to the Buyer. Buyer shall be responsible for all costs and expenses incurred from any changes to the approved Drawings or the specifications noted therein. The Buyer agrees to have an authorized member of the Buyer approve all drawings and specifications submitted by the Econo with respect to the Equipment within 10 days from date received from Econo. Failure to approve shall be considered an event of default. Buyer's is solely liable and responsibility for ensuring that the drawings and specifications for the Equipment are consistent with and meet the Buyer's requirements. Econo makes no representations regarding validity, soundness, strength, accuracy or adequacy of the specifications provided by Buyer and does not assume any liability or responsibility for the validity, soundness, strength, accuracy or adequacy of the specifications provided by the Buyer with respect to the Equipment not specifically set out in this Agreement. Econo will not be responsible for the performance of the Equipment where the Equipment is manufactured to the Buyer's own specifications. Buyer shall provide drawings, drafts and sketches, including the approved Drawings forthwith upon demand of Econo. The Buyer shall hold the Econo harmless against any expense or loss resulting from infringement of patents, trade marks or any other intellectual property rights arising from compliance with the Buyer's designs, specifications or instructions. All plans, drawings, designs or specifications supplied by one party to the other shall remain the property of, and shall be returned to, the first party on request or at termination or expiry of this agreement and shall not be copied and no information relating to the Equipment or special tooling shall be disclosed to any third party except for the purpose of this agreement. No photographs of a party's equipment, installations or property shall be taken without that party's prior written consent. Each party shall keep secret and shall not divulge to any third party any information received from the other party in connection with this agreement or which becomes known to the first party through its performance of this agreement or use the information other than for the purpose of fulfilling the terms of this agreement. All drawings, including without limitation, the approved Drawing shall be protectable by patent or other legal proprietary protection made or conceived during the term of this agreement and shall be the sole property of Econo. All Equipment will be furnished subject to commercial variations in material and production operations incident to the processes employed in manufacturing unless otherwise specified.

**ACCEPTANCE BY BUYER:** The Equipment shall be deemed accepted by Buyer of the date of receipt of the Equipment by Buyer. The Buyer shall have fifteen (15) days after such date to give Econo written notice that the Equipment does not conform to the drawings and specifications and to specify in detail the reasons therefore. Econo may then, at its sole election, proceed to make any necessary corrections. Under no circumstances shall Buyer be entitled to revoke acceptance of the Equipment subsequent to acceptance thereof.

**TITLE TO THE EQUIPMENT:** SEQ CHAPTER 1h 1r 1Title to, property in and ownership of the Equipment shall remain in the Econo's name until payment in full of the purchase price has been made. The Equipment shall not be removed from the premises of the Buyer without the written consent of Econo even in the ordinary course of business.

**SECURITY:** The Buyer hereby grants to the Econo a purchase money security interest in the Equipment. SEQ CHAPTER 1h 1r 1all personal property in any form derived from any dealing with the Equipment and the proceeds therefrom and all other assets of the Buyer including insurance proceeds and any other payment representing indemnity or compensation for loss together with all personal property and proceeds therefrom, until payment in full of the purchase price has been made, and agrees to do all things and to execute all documents necessary to protect such security interest. The Buyer appoints the Econo as its attorney to execute any documents or other instruments necessary to perfect and enforce the Econo's security interest. In the event of non-payment by the Buyer of any part of the purchase price, the Econo retains the right to remove the Equipment without notice, and any additional charges for removal or disassembly, as the case may be, shall be to the account of the Buyer.

**LIMITED WARRANTY:** Econo warrants to the original Buyer only, that the Equipment will be free from defects in material or workmanship for a period of 12 months after shipment from its factory, unless otherwise specified. Econo shall, at its option, repair or replace free of charge within the warranty period any components or assemblies supplied by Econo which prove to be defective in workmanship or materials, subject to the following: (a) The warranty period for all welded, structural, mechanical, pneumatic and hydraulic components and lead acid batteries shall be 12 months from the shipment date; (b) The warranty period for all electrical components shall be 6 months from the shipment date, or such other period specified by the manufacturer(s) of said electrical components; (c) Items supplied by Econo, but not of its manufacture, carry the original manufacturer's warranty which is passed on to the Buyer who will be required to deal directly with the manufacturer of such items on any warranty issues pertaining thereto. This warranty does not apply to damage or loss due to accident, improper use (including, without limitation, overloading), negligence, improper maintenance or modification of any part of the Equipment by the Buyer, its agents, employees, invitees and any person for whom it is in law responsible. This warranty is non-transferable and extended only to the original Buyer of the Equipment. THERE ARE NO EXPRESS OR IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, NOT SPECIFIED HEREIN RESPECTING THIS AGREEMENT, EQUIPMENT, SOFTWARE, PRODUCTS, DOCUMENTATION OR SERVICES PROVIDED. Econo assumes no liability for damages arising from the use of the Equipment by the Buyer or any third party. By purchasing Econo Equipment, the Buyer assumes all liability for any damages of any kind which may result from its use or misuse by the Buyer, Buyer's employees, agents, contractors or any other third party unknown to Econo or the Buyer, including damages due to failure of the Equipment.

**WARRANTY CLAIM PROCEDURE:** A warranty authorization number must be issued by Econo to Buyer before any parts are returned or service is performed. The warranty authorization number and a detailed explanation of the warranty claim must accompany the Equipment or parts returned for service. Econo reserves the right to request prepaid returns of such defective parts to its factory for inspection and evaluation. Warranty work will be done at Econo's facilities unless otherwise authorized. Replacement parts will be shipped F.O.B. from Econo's factory. Econo reserves the right of final determination on the validity of all warranty claims.

**DEFAULT:** If the Buyer is in default under this agreement and this default continues for five days after written notice of the default by Econo, then Econo may terminate the agreement with respect to the affected equipment, products or service. Econo has the right to declare the entire amount of the unpaid balance and any other charges to be immediately due and payable and to exercise any other remedy existing at law or in equity, including taking possession of the equipment, products and related documentation without notice or demand, and the sale, lease or other disposition of the equipment. The Buyer shall pay the Supplier all costs and expenses including legal fees (on a substantial indemnity basis) incurred in exercising its rights or remedies. In the event of default by the Buyer, Econo may require the Buyer to assemble the equipment and products provided under this agreement and make them available at a time and place reasonably convenient to Econo. No delay or failure of the Supplier to exercise any rights or remedy operates as a waiver of such rights or remedy. Buyer default includes (a) Non-payment of any account when due or non-performance of any obligation under this agreement or breach by the Buyer of any warranty or representation contained in this agreement (b) Dissolution, insolvency, receivership, assignment for the benefit of creditors or the commencement of any proceeding under any bankruptcy or insolvency laws by or against the Customer or any guarantor or surety of the Customer; and (c) Sale, encumbrance, seizure or attachment of any unit of the equipment prior to the passing of title to Customer;

**DAMAGES:** Econo, its officers, directors, agents and servants and its affiliates and their respective officers, directors, agents and servants shall not be liable to the Buyer nor to any other party for any liability, including without limitation, strict liability, including liability for loss or damages due directly or indirectly to occurrences or consequences which Econo's design and manufacturing services are designed to identify, any losses or damages, including without limitation economic and consequential losses, or direct or indirect, incidental, exemplary and punitive damages whether in contract, tort or otherwise or any other claims or expenses in any manner resulting, including without limitation liability, losses or damages directly or indirectly from, or connected with, the supply of the Equipment or the drawings or the manufacturing services whether or not supplied pursuant to this agreement, or from the discovery or elimination of any and all hazards, or from the failure to so discover or eliminate, or from the failure to provide the drawings, Equipment or manufacturing services or by reason of any action, omission, active negligence, passive negligence, including gross negligence or any error or omission in the drawings, Equipment or manufacturing services or any use or application thereof, misrepresentation, misstatement, imprudence, lack of skill or error of judgment of or by Econo or its officers, directors, agents and servants or its affiliates and their respective officers, directors, agents and servants. Notwithstanding anything in this Agreement to the contrary, Econo shall have no liability whatsoever whether arising in contract, tort, or otherwise, for loss of capital, loss of product, loss of profit, loss of use, loss of power, power outages, cost of replacement power, or any indirect, special, incidental or consequential damages.

**GOVERNING LAW & COMPLIANCE:** This Agreement shall be construed, interpreted and enforced in accordance with, and the respective rights and obligations of the parties shall be governed by, the laws of the Province of Ontario and the federal laws of Canada applicable therein, and each party irrevocably and unconditionally submits to the non-exclusive jurisdiction of the courts of such province and all courts competent to hear appeals therefrom.

**SEVERABILITY OF PROVISIONS:** If any provision of this Agreement is determined by a court of competent jurisdiction to be invalid, illegal or unenforceable in any respect, such determination shall not impair or affect the validity, legality or enforceability of the remaining provisions hereof, and each provision is hereby declared to be separate, severable and distinct.

**FORCE MAJEURE:** Econo's obligations under this contract are and shall be subject to acts of God, war, invasion, insurrection, riot, the order of any civil authority, breakdowns, strikes, lockouts, labour disputes, accidents, fire, inclement weather, delays in transportation or delivery of Equipment or any other cause or causes, whether or not similar to any of the foregoing, beyond Econo's reasonable control, and Econo shall not be liable for any loss or damages of any kind or nature whatsoever, whether direct, indirect or consequential, suffered by any person as a result of any such causes or any delay resulting therefrom. Econo reserves the right to terminate this contract should fulfillment hereof in whole or in part be delayed or rendered impossible by any of the foregoing causes. In the event of such termination, Econo's liability and obligations under or arising out of this contract shall cease except with respect to any Equipment shipped hereunder prior to such termination and the Buyer shall remain liable to accept and pay for Equipment so shipped.

**BANKRUPTCY:** If Buyer is declared or adjudicated bankrupt or makes a general assignment for the benefit of creditors or a proposal or arrangement under the Bankruptcy and Insolvency Act or any successor legislation thereto, commits an act of bankruptcy or proposes a compromise or arrangement or institutes proceedings or admits in writing an inability to pay debts generally as they become due, or a petition is filed against a party under the Bankruptcy Act, or a liquidator, trustee in bankruptcy, custodian, receiver, receiver and manager or any other officer with similar powers is appointed for the party, Econo may elect to terminate this agreement and discontinue all further manufacture, design or delivery.





## POLICIES & PROCEDURES

### SALES POLICY

All prices quoted are F.O.B. Mississauga, Ontario. Prices are subject to change without notice. Product specifications and designs may also change without prior notice.

### SHIPPING POLICY

All freight is shipped F.O.B. Econo Lift Limited. Freight charges will be made "Third Party Bill" by carrier, unless other arrangements have been made.

Econo Lift Limited is not responsible for loss or damage in transit. It is the responsibility of the receiver (consignee) to inspect for damage and to file claims against the carrier. Econo Lift Limited will assist the consignee whenever possible in filing for claims.

### RETURN POLICY

Returned lifts and parts Will not be accepted without prior authorization. A return lift or parts authorization number (RLA number or RPA number) must be issued and accompany any returned lift or part. Returned lifts and parts are subject to a 20% restocking charge. Damaged lifts are subject to additional surcharges.

### WARRANTY POLICY

Econo Lift Limited warrants their products to be free from defects in material or workmanship for a period of time from the date of shipment. A 1-year warranty is put on all welded structural, mechanical and hydraulic components and a 180-day warranty on electrical components.

**NOTE:** Lead acid batteries are warranted by the battery manufacturer for a period of 1 year from date of shipment. Econo Lift's limited warranty does not cover lifts or parts damaged by overloading, abuse or neglect in operation, accidents, or by the lack of normal maintenance.

### WARRANTY CLAIM PROCEDURE

A warranty Authorization Number must be issued before any parts are returned or service performed. Warranty work will be done at Econo Lift's facilities unless other arrangements have been authorized. A Warranty/Return Authorization Number must accompany any lift or part returned for service. Parts returned for inspection will have all transportation charges prepaid and a complete explanation of claim should accompany the lift or part. Replacement parts will be shipped F.O.B. Ont., Factory. Econo Lift Limited reserves the right of final determination on the validity of all warranty claims.

*(For full Terms & Conditions see Inside Back Cover)*

[www.econolift.net](http://www.econolift.net)

DISTRIBUTED BY:



18-3615 Laird Road,  
Mississauga, Ontario L5L 5Z8  
Telephone: (905) 828-1366  
Fax: (905) 828-6116  
1-800-387-8173 CANADA & U.S.A.  
Cat. 09/16



**TILTING • DUMPING • LIFTING • TURNING**

FOR SPECIAL SIZES AND CAPACITIES PLEASE CONSULT THE FACTORY

